



LED Small Spots

4GU10/LED/930/F35/DIM/G/120V T20 10/1

Philips standard and Glass LED spots are a perfect fit for basic spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 socket and are designed as a retrofit replacement for halogen spots. They provide the beautiful light and performance you expect from the LED technology at an affordable price.

Product data

| General Information | |
|---------------------------------------|---------------------|
| Base | GU10 [GU10] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 4-50W |
| Light Technical | |
| Color Code | 930 [CCT of 3000K] |
| Beam Angle (Nom) | 35 ° |
| Initial lumen (Nom) | 380 lm |
| Luminous Intensity (Nom) | 600 cd |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 95.00 lm/W |
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 4 W |


| Lamp Current (Nom) | 50 mA |
|---------------------------------|---------------------------------------|
| Wattage Equivalent | 50 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.7 |
| Voltage (Nom) | 120 V |
| Temperature | |
| T-Case Maximum (Nom) | 65 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Approval and Application | |
| Energy Efficiency Label (EEL) | Not applicable |
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | - kWh |
| Product Data | |
| Order product name | 4GU10/LED/930/F35/DIM/G/120V T20 10/1 |
| EAN/UPC - Product | 046677468149 |
| Order code | 468140 |

LED Small Spots

| | |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929002055504 |

| | |
|--------------------|----------|
| Net Weight (Piece) | 0.055 kg |
|--------------------|----------|



Dimensional drawing



T20 GU10 120V 5-50W 380lm 35D 3000K D

| Product | D | C |
|---------------------------------------|-------|-------|
| 4GU10/LED/930/F35/DIM/G/120V T20 10/1 | 50 mm | 54 mm |


Photometric data



DAWAT Parameters 41 Page Lighting 41 Page 17

LEDSpot T20 GU10



LEDSpot T20 GU10 3000K

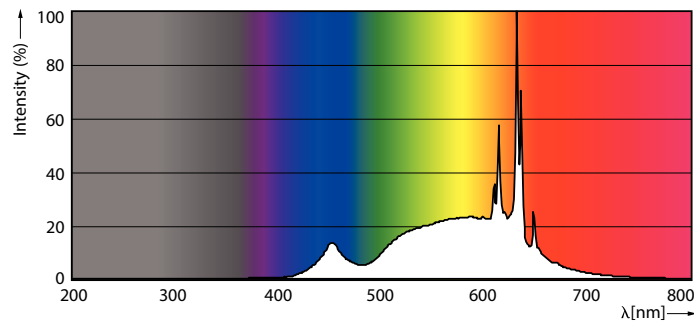

LEDSpot T20 GU10 3000K

LED Small Spots

Lifetime

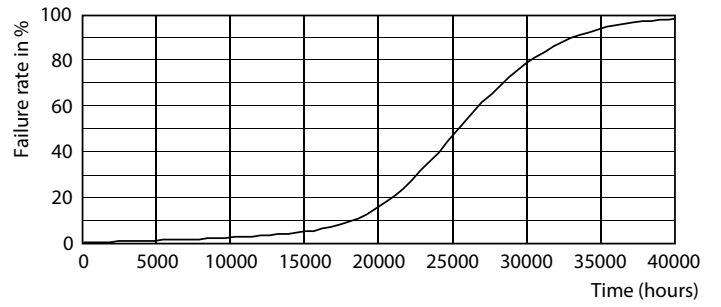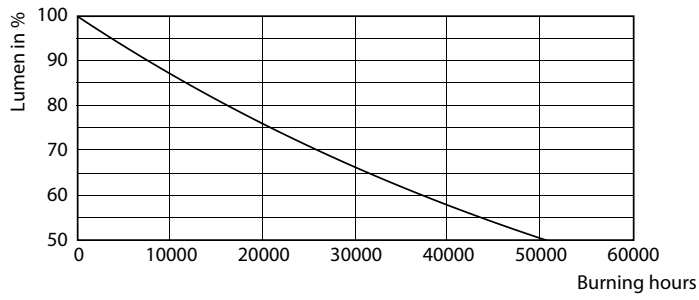

LEDSpot T20 GU10

LEDSpot T20 GU10

