

Field Adjustable & CCT Tunable Troffer Series Installation Guide

SAFETY INSTRUCTIONS: Read instructions carefully before attempting to install fixture.

- All wiring should be performed by a qualified electrician.
- Disconnect power before installing or servicing. This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- **CAUTION:** Do NOT use this product for other than intended use. To prevent early product failure, luminaire should only be used in operating environments ranging from -20°C (-4°F) to 40°C (104°F).
- All wiring is recommended to be capped with UL approved wire connectors.
- **CAUTION:** Wear gloves and safety goggles always when removing luminaire from carton, installing, servicing or performing maintenance.
- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and dispose packing material as these may be hazardous to children.

CAUTION: Risk of fire

- **WARNING:** Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.
- **WARNING:** Turn off electrical power at fuse or circuit breaker box before wiring the luminaire to the power supply.
- **WARNING:** Verify that the voltage is correct by comparing it with the luminaire label information.
- **WARNING:** Keep combustible and other materials that can burn away from luminaire.
- **WARNING:** Minimum 90°C supply conductors.

CLEANING & MAINTENANCE:

CAUTION: Be sure the fixture temperature is cool enough to touch. Do NOT clean or maintain while the fixture is energized.

1. Clean glass lens with non-abrasive glass cleaning solution.
2. Do NOT open fixture to clean the LED. Do NOT touch the LED.

Note: These instructions do not cover all details or variation in equipment, nor do they provide for every possible situation during installation, operation or maintenance.

TROUBLESHOOTING:

1. Check that the line voltage at fixture is correct. Refer to wiring directions.
2. Be sure the fixture is grounded properly.

OPERATING CHARACTERISTIC:

- Voltage Input: 120-277V 50/60Hz
- Operating Temperature: -20°C (-4°F) to 40°C (104°F)

1x4 and 2x2





ProLED® Select Volumetric Panel Install Instructions



Field Adjustable & CCT Tunable Troffer Series Installation Guide


2x4



INSTALLATION:


WARNING: ALL units must be individually connected to the AC supply.

1. Connect the **BLACK** fixture lead to the **LINE** supply lead.
2. Connect the **WHITE** fixture lead to the **COMMON** supply lead.
3. Connect the **GROUND** wire from fixture to **SUPPLY** ground.

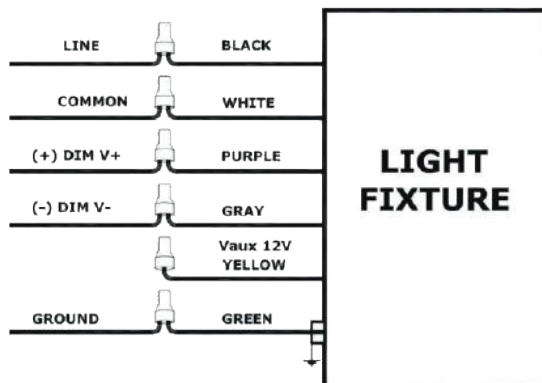

RECESSED CEILING MOUNT:

This fixture is ONLY suitable for indoor recessed ceiling application.

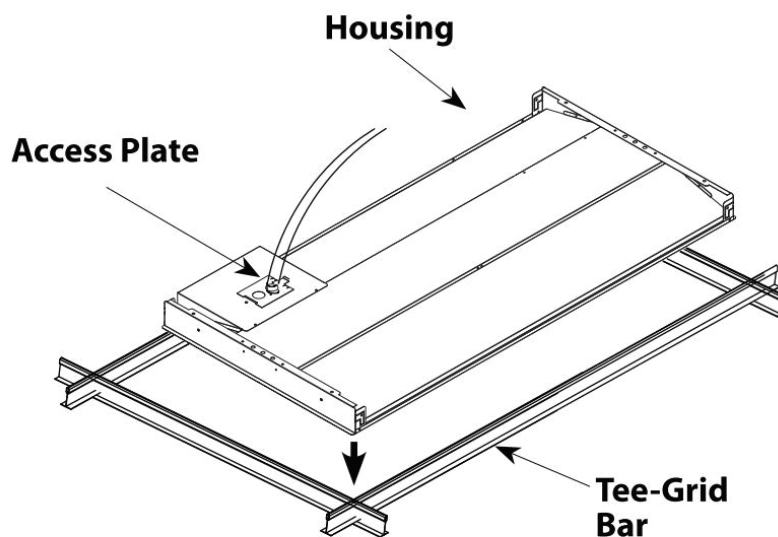

Warranty Information:

This product is warranted for five years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email or write to the address below for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded. Visit www.halcolighting.com for full warranty details and compatibility information.