

LED Exit/Emergency Combo

Illumination

- Long lasting, efficient ultra-bright white LEDs.
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long-lasting, energy efficient Red or Green LED exit sign.

Electrical

- Dual 120V/277V voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap thermoplastic mounting canopy included – provides top, or back mount.

Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.

Warranty/Listing

Spacing Chart


1'	0.24	0.31	0.46	0.43	0.44	0.49	0.59	0.8	1.01	0.83	0.91	0.08	0.37	0.2	0.16
2'	0.25	0.47	0.68	0.79	0.87	0.82	0.94	1.01	1.09	1.36	1.11	0.78	0.54	0.28	0.18
3'	0.39	0.67	0.96	1.02	1.08	1.14	1.09	1.30	1.40	1.10	0.92	0.85	0.72	0.47	0.22
4'	0.5	0.69	0.86	1.10	1.24	1.17	0.98	1.06	1.14	1.00	1.10	0.79	0.58	0.32	0.22
5'	0.48	0.69	0.78	0.84	1.03	1.05	0.8	0.78	1	0.87	0.63	0.5	0.35	0.3	0.24
6'	0.43	0.49	0.69	0.72	0.79	0.75	0.59	0.54	0.6	0.54	0.42	0.41	0.28	0.2	0.15
	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'	15'

Meets NFPA 101 fc requirements using 10' spacing on 3' path of egress



- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations (0°-40°C/32°F-104°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.

Dimensions

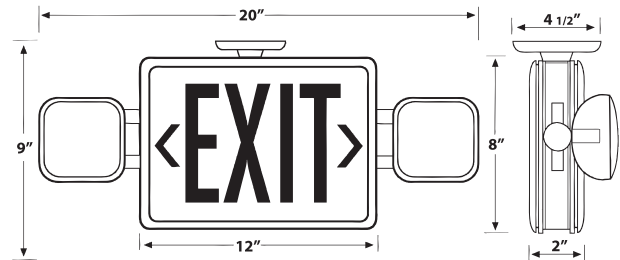

Electrical information

	Supply Voltage	Max. Watts	Max. Amps
Red	120V/277V	3.8w	0.040A
Green	120V/277V	3.2w	0.03A
Red-RC	120V/277V	3.6w	0.033A
Green-RC	120V/277V	3.2w	0.03A
Red-SDT	120V/277V	5.7w	0.046A
Green-SDT	120V/277V	5.4w	0.045A
Red-RCSDT	120V/277V	5.6w	0.045A
Green-RCSDT	120V/277V	5.4w	0.044A

Ordering Information

Model	Face #	Letter Color	Housing Color	Options
LEDCXTEU 1	Single Face	R Red	W White	SDT Self-diagnostics
	2 Double Face	G Green	B Black	HL 12 LED Head
				RC Remote Capable
				(Can connect to 2' additional LED)