LRD SERIES RESIDENTIAL LIGHTING




LRD-10W-27K-WTM3 LRD-10W-30K-WTM3 LRD-10W-35K-WTM3 LRD-10W-40K-WTM3 LRD-10W-50K-WTM3

LED ARCHITECTURAL RECESSED LIGHTS





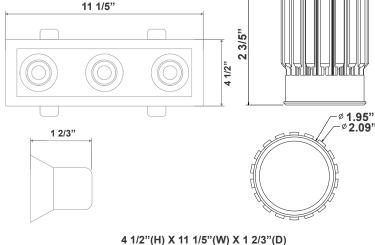

Ideal for New as well as old residential and commercial constructions.

Features

- LED Architectural Recessed Trim
- Die-cast Aluminum with white powder coat finish
- 5-Year Warranty
- · Junction box included with fixture

Technical Specifications

Electrical:

Voltage: 120VAC
Wattage: 10W
Power factor: >0.90
Efficacy: Up to 70 LM/W

Mechanical:

- Die-cast Aluminum with white powder coat finish
- Junction box included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: 104°F
- Lifespan: 50,000 Hrs.
- · Air-tight and Type IC Rated: No housing Required
- Damp location only

Lighting:

- Dimming: dimmable down to 10% using standard TRIAC LED dimmer
- Total lumens: 700LM
- Color temperature: 2700K/3000K/3500K/4000K/5000K
- Color rendering index: >90
- Beam Angle: 30°

Applications:

 Ideal for New as well as old residential and commercial constructions.

Other Models:

- 10W | 700LM | LRD-10W-27K-WTM1-WH
- 10W | 700LM | LRD-10W-30K-WTM1-WH
- 10W | 700LM | LRD-10W-35K-WTM1-WH
- 10W | 700LM | LRD-10W-40K-WTM1-WH
- 10W | 700LM | LRD-10W-50K-WTM1-WH
- 10W | 700LM | LRD-10W-27K-WTM2-WH
- 10W | 700LM | LRD-10W-30K-WTM2-WH
- 10W | 700LM | LRD-10W-35K-WTM2-WH
- 10W | 700LM | LRD-10W-40K-WTM2-WH
- 10W | 700LM | LRD-10W-50K-WTM2-WH













Photometrics: LRD-10W-WTM3-WH



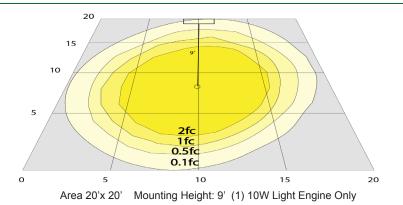

Other Views:



LRD-WTM3-WH LRD-WTM3-WH LRD-WTM3-WH LRD-WTM3-WH LRD-WTM3-WH LRD-EGN-10W-27K-D LRD-EGN-10W-30K-D LRD-EGN-10W-35K-D LRD-EGN-10W-40K-D LRD-EGN-10W-50K-D LRD-10W-27K-WTM3-WH LRD-10W-30K-WTM3-WH LRD-10W-35K-WTM3-WH LRD-10W-40K-WTM3-WH LRD-10W-50K-WTM3-WH

Performance Table: LRD-10W-WTM3-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRD-10W-27K-WTM3-WH	10W	120V	700LM	2700K	B1-U2-G0	70
LRD-10W-30K-WTM3-WH				3000K		
LRD-10W-35K-WTM3-WH				3500K		
LRD-10W-40K-WTM3-WH				4000K		
LRD-10W-50K-WTM3-WH				5000K		

Sample Ordering

Example:

1. LRD-10W-27K-WTM3-WH

(FOR LRD 10W 2700K FIXTURE 120V)



