



LED BA11

5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20

Philips LED BA11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.

Product data


General information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000
Light technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	300 °
Initial lumen (Nom)	500 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	5.5 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.75
Voltage (Nom)	120 V
Temperature	
T-Ambient (Max)	113 °F
T-Ambient (Min)	-4 °F
T-Case Maximum (Nom)	140 °F
Controls and dimming	
Dimmable	Only with specific dimmers
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	F15 (F15)
Approval and application	
Energy Certifications	Energy Star
Product data	
Order product name	5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20
EAN/UPC - Product	046677572662
Order code	572669
Numerator - Quantity Per Pack	1

LED BA11

Numerator - Packs per outer box	6
Material Nr. (12NC)	929002091593
Net Weight (Piece)	0.055 lb



Dimensional drawing



5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20


Product	D	C
5.5F15/PER/927-922/CL/G/E26/WGX 1PF T20	1-7/8 in	4-7/16 in

Photometric data

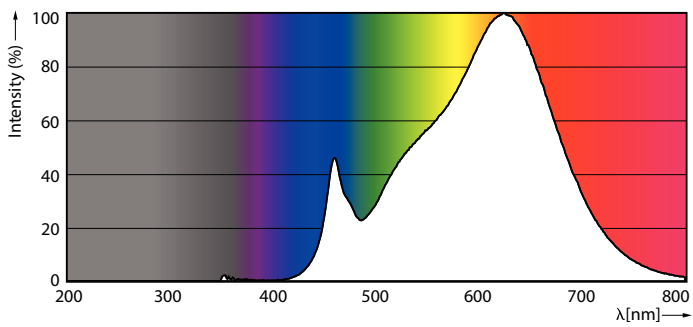

General uniform lighting

Spectral Power Distribution Colour



Light Distribution Diagram

General uniform lighting

LED BA11

Lifetime



Life Expectancy Diagram

Lumen Maintenance Diagram

