SDTL SERIES Commercial Lighting SDTL-6FT-25-50W-MCTP-BK


POWER & CCT- ADJUSTABLE LINEAR TUBE DECORATIVE SUSP. LIGHT







.9"

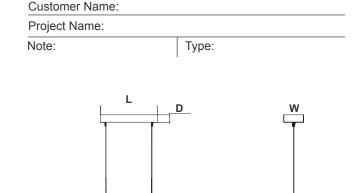

Canopy Dimension: 11 4/5"(L) x x 1.6"(D) x 4 1/5"(W)

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens Direct Down Light
- Pendant Mounted

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy Black Finish

70 4/5"

Technical Specifications

Electrical:

Voltage: 120-277V AC 50/60Hz
Wattage: 25W/40W/50W
Power Factor: >0.95

Total Harmonic Distortion: ≤19 %

LPW: 105LM/W

Mechanical:

- Aluminum Housing With Sandy Black Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- Black Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Ename
- Opal Polycarbonate Tube Lens Direct Down Ligh
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Indoor Use Olny
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 5250LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Ssed In Sny Indoor Applications

Other Models:

50W | 5250LM | SDTL-6FT-25-50W-MCTP











Photometrics: SDTL-6FT-25-50W-MCTP-BK



BUD Rating: B1-U2-G1

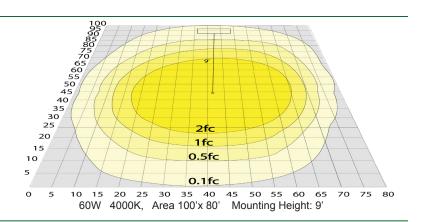

Other Views:







Bottom View

Side View Front View

Performance Table: SDTL-6FT-25-50W-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SDTL-6FT-25-50W-MCTP-BK	25W		2625	3000K		105
	40W	120~277V	4200	3500K	B1-U2-G1	
	500W		5250	4000K		

Sample Ordering

Model		Size	Wattage		Э	Wattage		Color Temp.		Finish	
SDTL	_	6FT	_	25	_	50W	_	MCTP	_	BK	

Factory-Installed Options:

Blank = No Option For Accessories OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:





OPT-EM-SL1INT

Example:

1.SDTL-6FT-25-50W-MCTP-BK

(For SDTL 50W MCTP fixture 120-277V)

2.SDTL-6FT-25-50W-MCTP-BK OPT-EM-SL1INT

(For SDTL 50W MCTP fixture 120-277V) (EMERGENCY BACKUP INTERNAL BATTERY)





