

FEATURES

- Flicker free
- Light weight and durable aluminum + PC housing
- Earthquake clips for secure recessed applications
- Recessed, Surface or Suspended mounting options
- 50,000 hours lifetime
- Multi Wattages and color panels

SUITABLE APPLICATIONS

- Government Buildings
- Corporate Offices
- Hospitals
- Schools
- Colleges
- And more!

TECHNICAL DATA

CRI: Ra83

Operation Temperature: -4 ~113 °F

Input Voltage: AC 120-277V

Beam Angle: 113°

Dimming: 0-10V Continuous Dimming

2 x 4
25W/30W/35W/40W/50W
or 60W/65W/72W





NOT AVAILABLE
AT THIS TIME

1 x 4
15W/20W/25W/30W/40W


2x2
15W/20W/25W/30W/40W

DIMENSIONS UNIT: MM/INCH


1 x 4
15W/20W/25W/30W/40W

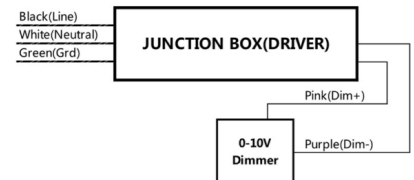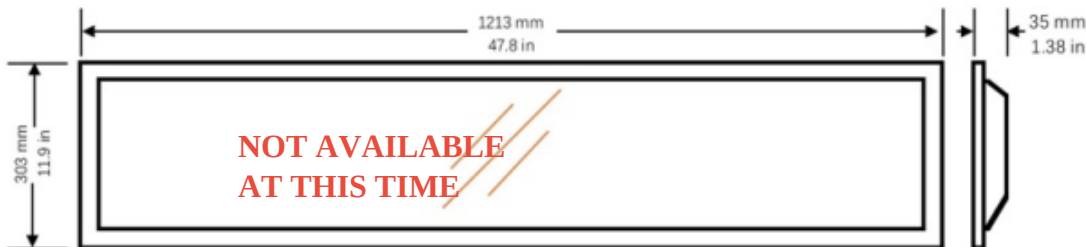

2x2
15W/20W/25W/30W/40W

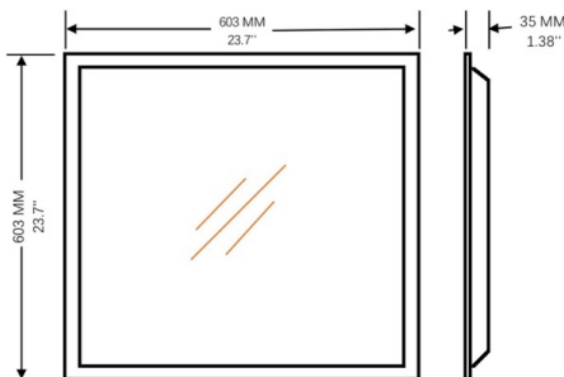


2 x 4
25W/30W/35W/40W/50W
or 60W/65W/72W

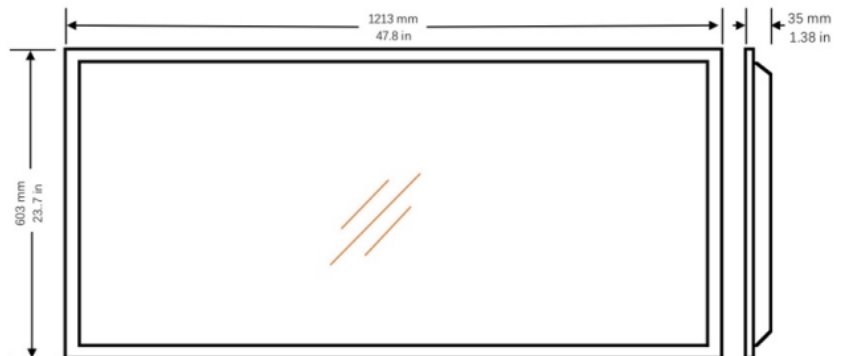


MODEL	WATTS	LUMENS	COLOR TEMP.
SSL960BLFP-1X4-ADJ NOT AVAILABLE AT THIS TIME	15W	1950lm	35K
	20W	2600lm	40K
	25W	3250lm	50K
	30W	3900lm	57K
	40W	5200lm	65K
SL960BLFP-2X2-ADJ	15W	1950lm	35K
	20W	2600lm	40K
	25W	3250lm	50K
	30W	3900lm	57K
	40W	5200lm	65K
SL960BLFP-2X4-ADJ	25W	3250lm	35K
	30W	3900lm	40K
	35W	4550lm	50K
	40W	5200lm	57K
	50W	6500lm	65K
SL960BLFP-2X4-ADJ	60W	7500lm	35K
	65W	8200lm	40K
	72W	9000lm	50K
			57K
			65K

MOUNTING OPTIONS

Backlit Panels require surface mount kits.



Cable Suspension Kit. Cable length = 1M

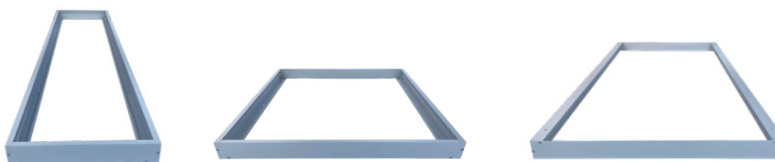

Surface Mount Kit. Height = 50MM ≥ 35MM (Panel Height)

