

# SL SERIES Outdoor Lighting

SLX-2H-MCTP-BR-D

SLX-2H-MCTP-WH-D

SLX-2H-MCTP-BK-D

NO-SENSOR DIMMABLE X-GEN ADVANCE SECURITY LIGHTS

**MCTP** Multi Color Temperature (Selectable)

# WESTGATE

THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_


Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_



Selection:

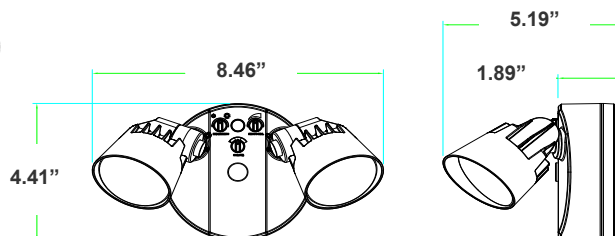

8.46"(H) x 4.41"(W) x 5.19"(D)

The SLX Security Lights from Westgate Mfg. are designed to offer versatile and efficient lighting with adjustable switches for brightness (2-power), Correlated Color Temperature (CCT), and dusk-to-dawn photocell sensitivity. These features enable users to customize light intensity, select preferred color temperatures, and control the lights' activation based on ambient light conditions. Constructed with high-quality materials for durability, the SLX Security Lights ensure reliable performance in various weather conditions, making them an ideal choice for enhancing security and visibility in residential, commercial, and industrial settings.

## Features

- Durable Construction
- Easy Installation
- Adjustable Brightness (2-Power)
- Adjustable CCT
- Dusk-to-Dawn Photocell Sensitivity

## Technical Specifications

### Electrical:

- Voltage: 120V AC, 50/60Hz
- Wattage: 16W/25W
- Power Factor: >0.9
- Efficacy: 130 LM/W

### Mechanical:

- Die-cast Aluminum, Powder Coated
- Integrated Dusk to Dawn Photocell. The Sensitivity Can Be Adjusted By The Switch on The Canopy.
- Adjustable (1%-100%) Brightness Switch On The Canopy
- Strict Waterproof Treatment Technology, In Line with International Waterproof and Dustproof Standards
- Operating Temperature: -40°F~104°F
- Suitable for Wet Location
- 7-Year Warranty

### Lighting:

- Dimming: TRIAC dimming
- MCTP: Multi-Power & CCT, The Switch Is On The Canopy
- Color temperature: 3000K/4000K/5000K
- Total Lumens: 3250LM
- Color Rendering index: >80
- Beam Angle: 100°
- Lifespan: 70000 Hrs.

### Applications:

- Residential Security: Enhance home safety
- Commercial Properties: Improve visibility
- Industrial Sites: Ensure secure operations
- Parking Areas: Increase safety
- Public Spaces: Boost nighttime illumination

### Other Model:

- 25W | 3250LM | SLX-2H-MCTP-P





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-20240528

## Photometrics: SLX-2H-MCTP-P



BUG Rating: B1-U1-G0

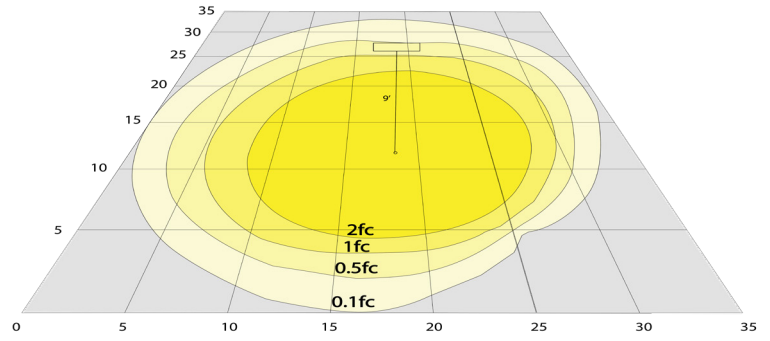

20W, 5000K Area 35'x 35' Mounting Height: 9'

## Other Views:



Side View



Top View



Front View



Side View



Top View



Front View



Side View



Top View



Front View

## Performance Table: SLX-2H-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SLX-2H-MCTP-BR-D	16W	120-277V	2080LM	3000K	B1-U1-G0	130
SLX-2H-MCTP-WH-D	25W		3250LM	4000K		
SLX-2H-MCTP-BK-D				5000K		

## Sample Ordering

Model		Style		Color Temp.		Finish		Dimming
SLX	-	2H	-	MCTP	-		-	D
BR = Bronze WH = White BK = Black								

