

**ST | VERSASTRIP LIGHTS (2-PACK)**  
 4000K VERSATILE LED STRIP LIGHTS  
 0-10V Dimming | Efficacy 119 LPW

**KEY FEATURES**

ETi SSL's VersaStrip Lights can be installed in a wide array of configurations. Up to (8) 4' strips can be linked together to provide sufficient light coverage for large areas in multiple configurations. This makes them ideal for garages, repair shops, store aisles, open concept offices and more.

**CCT & Light Quality**

- CCT 4000K, CRI up to 85

**Light Output & Efficacy**

- High Lumen Output: 11526 lm, 119 LPW

**Life**

- Reported 90.79% lumen maintenance @ 54,000 hours and projected L70 @ > 60,000 hours.

**Dimming, Voltage**

- 0-10V Dimming, 120-277V

**SPECIFICATIONS**

**Construction & Optics**

- Cold rolled steel housing, white powder coated
- Frosted, 1mm thick polymer lens provides a uniform and soft visual appearance when in direct view with minimal LED pixelation and reduces glare

**Installation**

- Comes with surface and suspension mounting kits
- 1 continuous linking bracket, 2 parallel linking brackets and 2 plastic covers included
- The following brackets also available (sold separately):

- Adjustable Linking Bracket
- L Linking Bracket
- T Linking Bracket
- Parallel Linking Bracket for 3 Fixtures
- Cross Linking Bracket

**Electrical**

- >60,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- 0-10V dimmable driver
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- OC/Daylight Sensor, and Motion Sensor field installed accessories available

**Warranty**


5-Year Standard Warranty. See terms at: [ETiSSL.com/warranty/](http://ETiSSL.com/warranty/)

KEY DATA	
Lumen Range	11525
Wattage Range	97.0
Efficacy Range (LPW)	118.8
Reported Life (Hours)	L70 / > 60,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



**VersaStrip**



Continuous and Tandem Linking brackets Included


**Certifications & Test Data**

- All luminaires are cULus listed and are built for damp location use
- Adheres to LM79, and TM30 industry standards for photometric, lumen maintenance and lifetime calculations
- DLC® (DesignLights Consortium) Qualified. Please refer to DLC for specific product qualifications at [www.designlights.org](http://www.designlights.org) (see search info on page 2)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



# 4' VERSASTRIP 2-PACK VERSATILE STRIP LIGHTS | 4000K | 11526 DELIVERED LUMENS

## CATALOG LOGIC

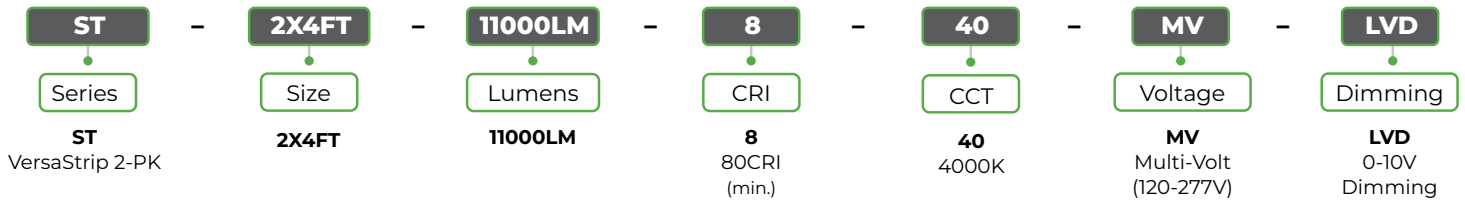



## STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description (Dia)	Case QTY	CRI	CCT	Watts (Nom.)	Lumen Pkg	Delivered Lumens	Volt.	Dim	DLC
ST-2X4FT-11000LM-8-40-MV-LVD	54598341	4' 2-Pack Strip Light	2	80+	4000K	97	11000	11526	120-277V	0-10V	Standard Search: 545983###




Note:  
Specifications are based on the 2-Pack unit.

## AVAILABLE STOCK ACCESSORIES (must be ordered separately, field installed)






### Sensors (order separately, field installed)

Order Number	Description	Image
90600121	Multi-Volt Occupancy Sensor with Daylight Sensor	
90600647 (OS-ST-01)	Motion Sensor, Parallel, Twin Strip Configuration Only	


## Included Mounting Brackets (More can be ordered separately, field installed)

Catalog Part Number	Order Number	Description	Image
BR-ST-CLB	90600737	Continuous Linking Bracket (1 is Included with 2-Pack Luminaire)	
BR-ST-PLB	90600738	Parallel Linking Bracket 2 Fixtures (2 are Included with 2-Pack Luminaire)	
BR-ST-PC	90600739	Plastic Cover (2 are Included with 2-Pack Luminaire)	

**Additional Mounting Brackets** (must be ordered separately, field installed)

Catalog Part Number	Order Number	Description	Image
BR-ST-AL-01	90600652	Adjustable Linking Bracket	
BR-ST-LL-01	90600648	L Linking Bracket	
BR-ST-TL-01	90600649	T Linking Bracket	
BR-ST-PL-01	90600650	Parallel Linking Bracket 3 Fixtures	
BR-ST-CL-01	90600651	Cross Linking Bracket	


**DIMENSIONS / DETAILS**

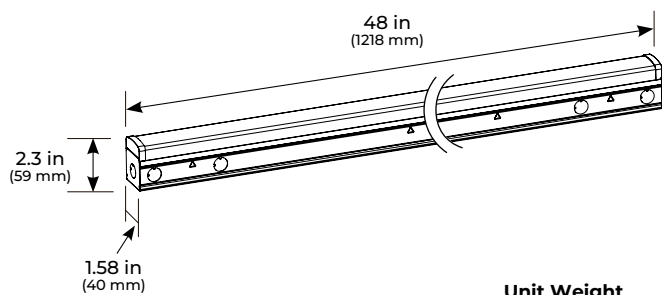


**Unit Weight**  
3.65 lbs  
(per luminaire)

**MOUNTING**

Surface Mount Kit




Suspension Mounting Kit

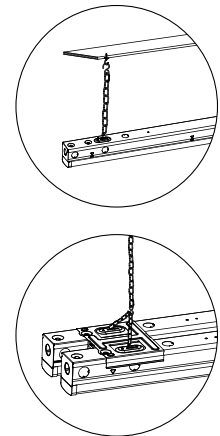

- Luminaire 2-Pack Includes:
- 1 Continuous Linking Bracket
  - 1 Mounting Bracket
  - 1 Wire Protection Ring
  - 4 Suspension Mount Chains, Hooks, Toggle Bolts
  - 2 Knock Out Covers
  - 2 Parallel Linking Brackets
  - 2 Plastic Covers + Screws

**QUICK CONNECTORS ALLOW FOR EASY INSTALLATION**

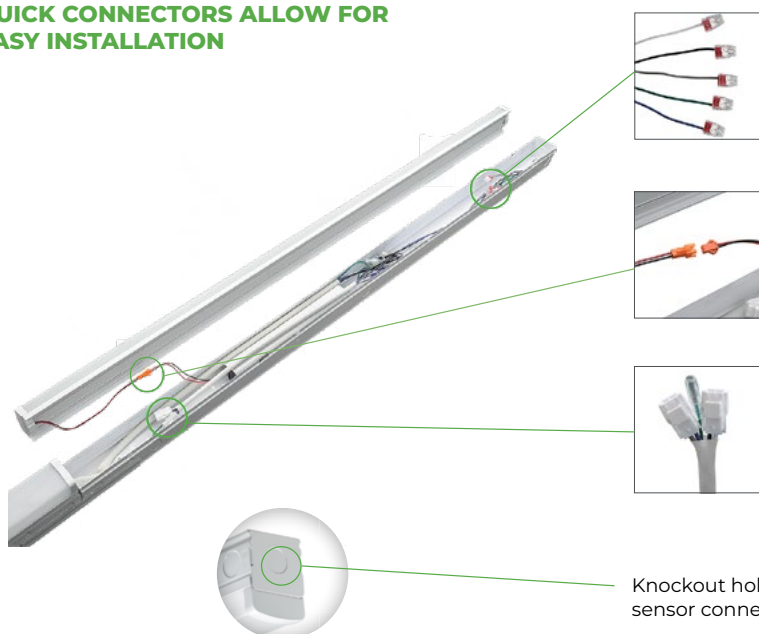


Multi-voltage wiring with quick connectors

Lamp detaches for easy installation

Link additional fixtures easily with installed wiring harness

Knockout hole for sensor connection

**MULTIPLE CONFIGURATIONS**

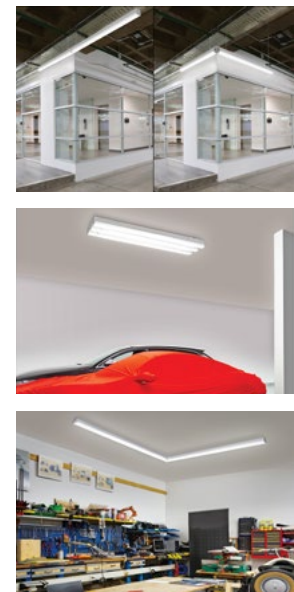

**PERFORMANCE / DATA**

**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	90.79%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 60,000

**Load Information**

<b>Power Factor</b>	>0.90
<b>THD</b>	< 20%
<b>Frequency</b>	50/60 Hz
<b>Sound Rating</b>	< 20 Dba
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 45° C (113° F)

**PHOTOMETRY**



**Luminaire Data:** (Per 2-Pack Unit)

CCT & CRI	<b>4000K, 80+ CRI</b>
Initial Delivered Lumens	<b>11525.4</b>
Wattage	<b>97W</b>
Efficacy	<b>118.8</b>
Spacing	<b>0° = 1.26 90° = 1.31</b>

Note: Test Data based on single fixture.

**Indoor Candela Plot**

