

Type IC & Air-Tight



### DESCRIPTION

4" Recessed LED With Integral Driver In Connection Box  
Round & Square Options for Trims



### FEATURES & BENEFITS

**1,000 Lm Output** - High Performance Fixture  
**CRI 90+** for True Color Rendering  
**3 1/2" Thick** - Install Where Ceiling Space Is Limited  
**Type IC Rated** - No Housing Required  
**Fast & Easy To Install** - Save On Labor  
**Driver Inside Connection Box** - No Junction Box Needed

**DIMENSIONS** ID 3 1/8" OD 4 1/2" Cut Out 3 3/4"

Ceiling Clearance Required: 3 1/2"

120V Triac Dimmable Driver Included

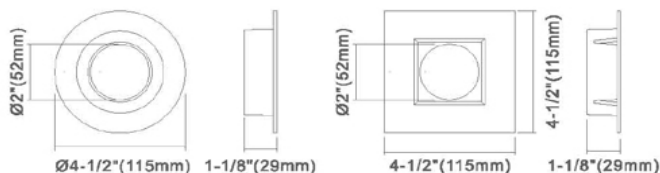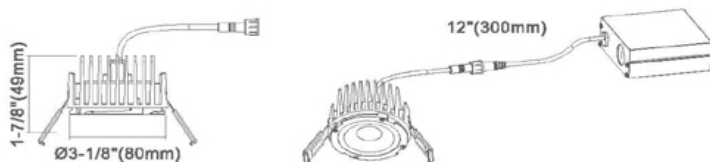

### ORDERING GUIDE

	CCT	Trim
AD-LED-4-S15W	- xxK	- T4xx

Example: 30K Round White Trim  
AD-LED-4-S15W-30K-T4RW

Project:

Location:

Trim:

Qty:

Notes:

### SPECIFICATION

Applications	Commercial & Residential Recessed	
Energy Used	15 W	
Color Temperature (K)	3000	4000
Light Output (lm)	1000	1020
Halogen Equivalent	100 W	
Beam Angle	40°	
CRI	90 +	
Driver Input	120V AC 50/60 Hz	
Dimming	TRIAC Dimmers 10% - 100%	
Approved Location	Insulated Ceiling & Damp Locations	
Air Tight	Yes	
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cETLus, Energy Star, T24	
Warranty	5 Year	


### Stock Trims



**T4RW**  
Round White



**T4RB**  
Round Black



**T4SW**  
Square White



**T4SB**  
Square Black

Other Trim Colors Available By Custom Order, MOQ 500 pcs

### ACCESSORIES

Sold Separately



Jumper Cable 10 ft cat # JC10  
Maximum Extension 40 feet



Flanged Rough-In Plate with expandable bars  
cat # FRP312



Flat Mounting Plate 13" long  
cat # MP334