



LL3R

3" Round Slim Recessed LED 11W



DESCRIPTION

3" Round Slim Recessed LED With Integral Driver In Connection Box


FEATURES & BENEFITS

- 1 1/4" Deep - Install Where Ceiling Space Is Limited
- Type IC Rated - No Housing Required
- Air-Tight & Wet Location rated
- 5CCT** user selectable 2700-3000-3500-4000-5000K
- or **Dim to Warm** 3000K to 1800K options
- CRI 90+ for True Color Rendering
- Options of 4 beam angles: standard **38°** and custom **15°, 24° & 60°**
- Driver Inside Connection Box - No Junction Box Needed

MOUNTING

- Cut Hole In Ceiling And Snap Fixture In Opening
- With Attached Spring Clips
- Ceiling Clearance Required for driver to fit: 3 1/2"

DIMENSIONS: ID 2 7/8" OD 3 1/2" Cut Out 3"

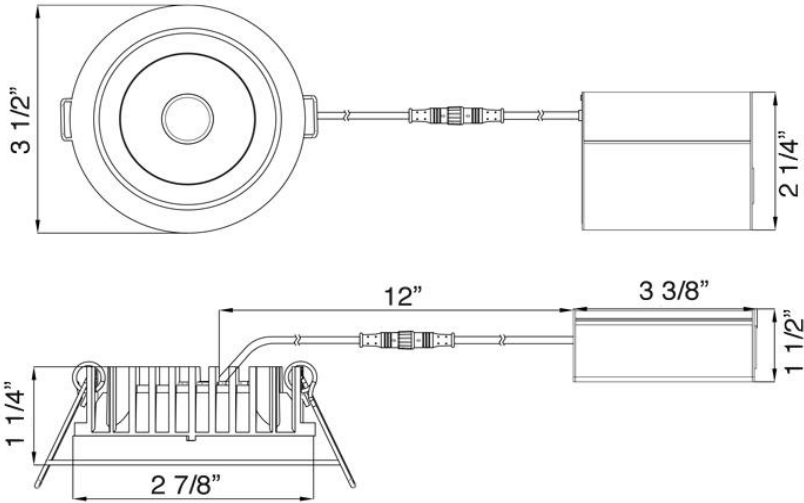

ORDERING GUIDE

LL3R-5CCT-WH	5CCT White Trim
LL3R-3018K-WH	Dim to Warm White Trim
LL3R-5CCT-BK	5CCT Black Trim
LL3R-3018K-BK	Dim to Warm Black Trim
LL3R-5CCT-ORB	5CCT Oil Rubbed Bronze Trim
LL3R-3018K-ORB	Dim to Warm Oil Rubbed Bronze Trim

Standard Beam Angle: 38°	
Custom Beam Angles - order as adder:	
15D Lens LD3R LD3S LL3R	15°
24D Lens LD3R LD3S LL3R	24°
60D Lens LD3R LD3S LL3R	60°

Project:

Location:

Model:Beam:Qty:

Notes:

SPECIFICATION	
Applications	Renovations & New Construction
Power	11 W
Color Temperature (K)	2700 3000 3500 4000 5000 DTW 3000-1800K
Light Output (lm)	780 850 920 940 930 900
Halogen Equivalent	90 W
Beam Angle	standard 38° custom 15°, 24°, 60°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



120V TRIAC Dimmable Driver Included		Optional 120V-347V Driver 0-10V Dimmable Order Separately as model # LLL-LD1025T3
--	--	--

ACCESSORIES

Sold Separately

	Low Voltage Extension Cables. Max 40 ft Allowed 6ft - model # EXC6 20ft - model # EXC20
	Flat Rough-In Plates - model # RIP3
	Flanged Plate with Hanger Bars model # FRP3

COMPLIANCE



Type IC & Air-Tight
Wet Location

Lotus LED Lights USA	www.LotusLEDLights.com	Lotus LED Lights CANADA
250 H Street # 301, Blaine WA 98230 tel 360-200-5500	mailing addresses	1080 Cliveden Ave # 6, Delta BC V3M 6J6 tel 604-538-3090
Hainesport NJ, Naples FL, Vancouver WA	warehouses	Delta BC & Mississauga ON