

LEDVANCE Luminaires

DUAL SELECTABLE VOLUMETRIC 6A TROFFER

VALUE CLASS

Application

The Volumetric 6A Troffer is offered in three sizes (1'x4', 2'x2', and 2'x4') and is ideal for illuminating offices, retail spaces, hallways, healthcare applications, multipurpose rooms and hospitality areas.

Benefits and Features

- Lumen and CCT selectability offer the ultimate in versatility for a large variety of applications and installations
 - 1x4: 20/24/28/32 wattage selectable
 - 2x2: 20/24/28/32 wattage selectable
 - 2x4: 24/32/39/44 wattage selectable
 - 2x4: 49/59/69 wattage selectable
- All versions are 3500/4000/5000K CCT Selectable
- Sensor base built into each fixture enables the simple field installation of optional PIR motion sensors
- 120-347V operating voltage range
- Up to 125 LPW
- DLC 5.1
- Ideal in retrofit and new construction applications
- Driver includes 12V auxiliary output
- Optional flange kits and surface mount kits available
- Optional emergency backup battery

Electrical

- 120-347V
- 0-10V Dimming
- 2.5kV Surge Protection
- Power Factor >90%
- THD <20%
- UL Damp Rated

Rated Life

- 150,000 hours (L₇₀)

Warranty

- 5-year
- NLB Trusted Warranty Program

Ambient Operating Range

- -4°F to +104°F (-20°C to +40°C)



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings	Fixture Size
1x32 T8	28	20	29%	1x4; 2x2
2x28W T8	49	24	51%	1x4; 2x2; 2x4
2x32W T8	56	28	50%	1x4; 2x2
2x32W T8	56	32	43%	1x4; 2x2; 2x4
3x28W T8	64	39	39%	2x4
3x32W T8	75	39	48%	2x4
3x32W T8	75	44	41%	2x4
2x54W T5	87	49	44%	2x4
4x28W T8	97	59	32%	2x4
2x54W T5	87	49	44%	2x4
4x28W T8	97	59	38%	2x4
4x28W T8	97	69	29%	2x4
4-lamp 32T8	112	69	38%	2x4

Certifications and Listings

- cULus
- RoHS
- FCC
- DLC 5.1
- TAA

Unique Selling Points

- Dual selectable
- Field installable PIR Motion Sensors
- 120-347V operating voltage range
- 12V Aux output

Installation

- Luminaire lays in standard 15/16" and 9/16" T-grid ceilings

Mounting Accessories

- Optional surface mount kits and flange kits



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	

Ordering Guide

VOLUME	6A	/ S0XX	UNH	D	8	SC7	/ XX	U	/ WH	/ E
Product Name	Generation	Selectable Wattage	Input Voltage	Dimming	CRI	Selectable CCT	Size	Mounting	Color	Option
Volumetric Troffer	6A = Generation 6A	S032 = 20/24/28/32W S044 = 24/32/39/44W S069 = 49/59/69W	UNH = 120-347V	D = 0-10V dimming	8 = 80+	SC7 = 3500/ 4000/ 5000K	14 = 1x4 22 = 2x2 24 = 2x4	U=15/16" and 9/16" T-grid ceilings	WH = White	Emergency Battery Back-up

Ordering Information

Item Number	Ordering Abbreviation	Dimensions	Wattage (W)	Lumen Selection	CCT Selection	CRI	Voltage	LPW	Dimming	DLC	Options
62532	VOLUME6A/S032UNHD8SC7/14U/WH	1x4	20/24/28/32	2500/3000/ 3500/4000	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	—
62827	VOLUME6A/S032UNHD8SC7/14U/WH/E	1x4	20/24/28/32	2500/3000/ 3500/4000	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	Emergency Battery Back-up*
62533	VOLUME6A/S032UNHD8SC7/22U/WH	2x2	20/24/28/32	2500/3000/ 3500/4000	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	—
62828	VOLUME6A/S032UNHD8SC7/22U/WH/E	2x2	20/24/28/32	2500/3000/ 3500/4000	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	Emergency Battery Back-up*
62534	VOLUME6A/S044UNHD8SC7/24U/WH	2x4	24/32/39/44	3000/4000/ 4875/5500	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	—
62829	VOLUME6A/S044UNHD8SC7/24U/WH/E	2x4	24/32/39/44	3000/4000/ 4875/5500	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	Emergency Battery Back-up*
62535	VOLUME6A/S069UNHD8SC7/24U/WH	2x4	49/59/69	5625/7375/ 8625	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	—
62830	VOLUME6A/S069UNHD8SC7/24U/WH/E	2x4	49/59/69	5625/7375/ 8625	3500/4000/ 5000K	>80	120-347V	125	0-10V	5.1	Emergency Battery Back-up*

* = EMBB provides 1000 lumens for a period of at least 90 minutes.

Accessories

Item Number	Ordering Abbreviation	Description
62782	SMK6A/14/WH	1x4 Surface Mount Kit
62783	SMK6A/24/WH	2x4 Surface Mount Kit
62784	SMK6A/22/WH	2x2 Surface Mount Kit
62785	FK6A/14G/WH	1x4 Flange Kit
62786	FK6A/24G/WH	2x4 Flange Kit
62787	FK6A/22G/WH	2x2 Flange Kit
62711	VOLUME/PIR/MOTIONDAYSENSOR1*	Field installable PIR Motion/Daylight Sensor
65305	STRIP2A/REMOTE	Remote with screen for PIR Sensor

*Sensor default settings can only be changed with optional remote 65305

Default sensor settings*

Detection Area: 100%

Hold Time: 5 Minutes

Daylight Threshold: 50 Lux

Stand-by Period: 30 Minutes

Stand-by Dimming: 30%


*Note: Sensor default settings can only be achieved using the optional remote – NAED 65305

Sensor Remote




Physical Information


1x4

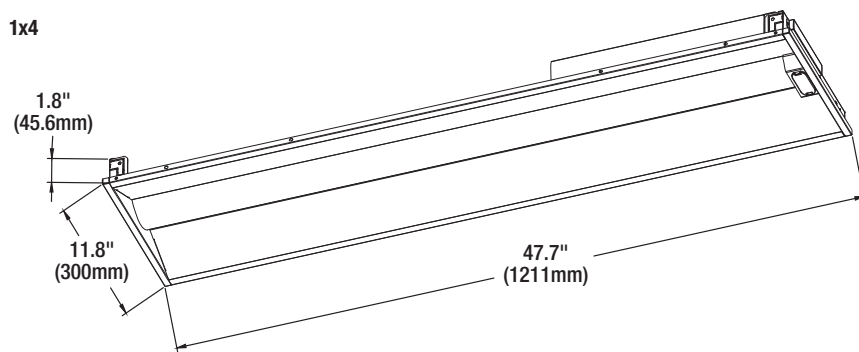

2x2

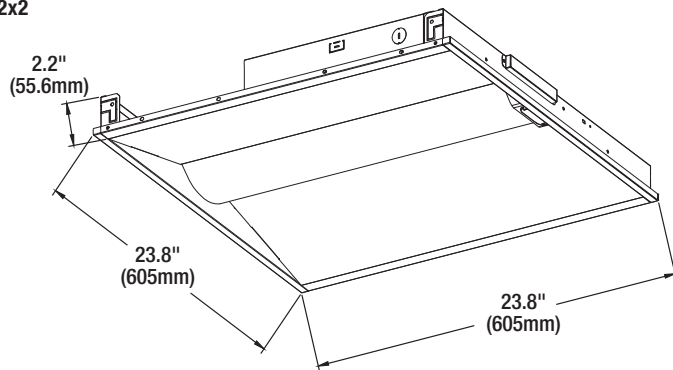

2x4

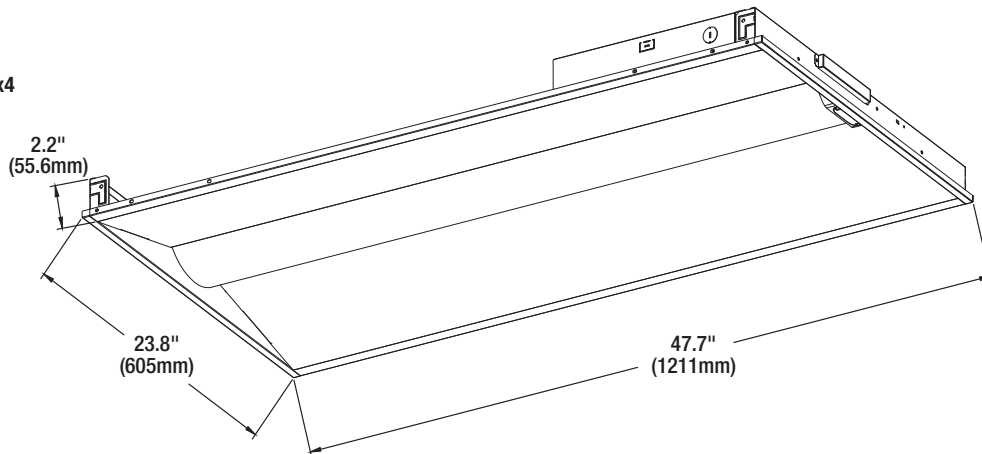

LEDVANCE LLC
181 Ballardvale Street
Wilmington, MA 01887 USA
Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
All other trademarks are those of their respective owners.
Licensee of product trademark SYLVANIA in general lighting.
Specifications subject to change without notice.

