

WMC SERIES OUTDOOR LIGHTING

WMC-UDL-MCT-BR-DT
WMC-UDL-MCT-BN-DT
WMC-UDL-MCT-WH-DT


Customer Name: _____

Project Name: _____

Note: _____ Type: _____



Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

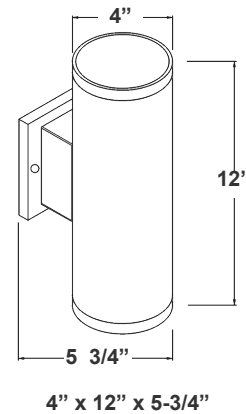

Features

- Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor UP/Down Light

Technical Specifications

Electrical:

- Voltage: 120V AC
- Power Factor: >0.95
- Wattage: 15W (Down light); 30W (Up/Down light, 15W per end)
- Efficacy: 80 LPW

Mechanical:

- Outdoor Wall Cylinders
- Housing: Die-cast aluminum
- Finish: Bronze/ Brushed Nickel
- Maximum Ambient Temperature: 104°F
- Rated life: 70,000 hrs
- Wet Location
- IP Rating: IP65

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 2400LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- 7-Year Warranty
- Beam angle: 40° for each side

Applications:



- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:


- 15W | 1200LM | WMC-DL-MCT-BR-DT
- 15W | 1200LM | WMC-DL-MCT-BN-DT
- 15W | 1200LM | WMC-DL-MCT-WH-DT



Photometrics: WMC-UDL-MCT

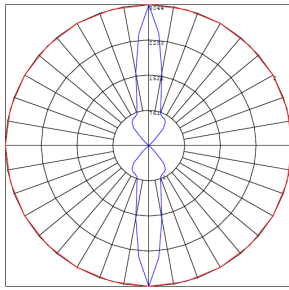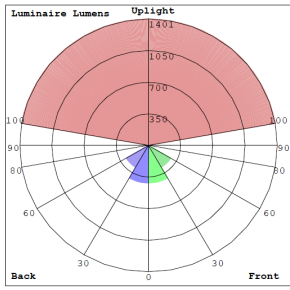

BUG Rating: B1-U5-G0

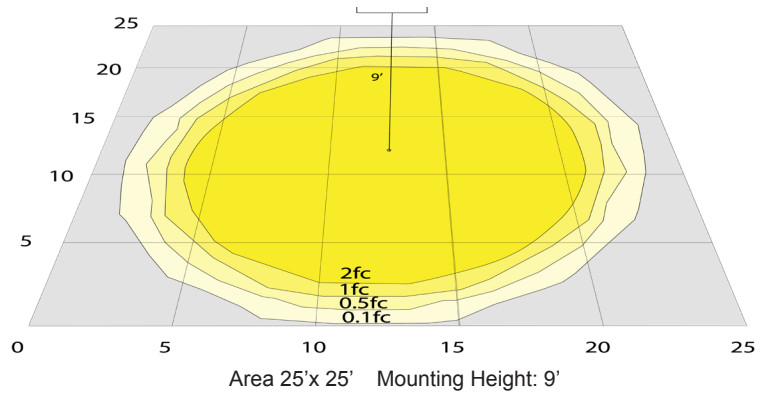

Other Views:

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View

Performance Table: WMC-UDL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC-UDL-MCT-BR-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80
WMC-UDL-MCT-BN-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80
WMC-UDL-MCT-WH-DT	30W	120V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	80



Sample Ordering

Model **Light Direction** **Color Temp.** **Finish** **Dimming**

WMC - UDL - MCT - - DT

BR = Bronze
BN = Brushed Nickel
WH = White

Factory-Installed Option:

Blank = No Option For Accessories

OPT-PC-B = FOR 120V-277V PHOTOCELL

OPT-EM-OD1INT = INTERNAL EMERGENCY BACK UP BATTERY

Example:

1. WMC-UDL-MCT-BR-DT (FOR WMC 30W UP/DOWN LIGHT MCT BRONZE FIXTURE 120V)
2. WMC-UDL-MCT-BR-DT (FOR WMC 30W UP/DOWN LIGHT MCT BRONZE FIXTURE 120V)
 OPT-PC-B (FOR 120V-277V PHOTOCELL)

FACTORY-INSTALLED OPTION:



OPT-PC-B
FOR 120V-277V PHOTOCELL



OPT-EM-OD1INT
INTERNAL EMERGENCY
BACK UP BATTERY

