Project:	Туре:	Date:	Notes:	



### **BL2S-LED120A50**

Barn/Area Light LED





#### **IDEAL APPLICATIONS**







Farming



Roadway & Landcape Lighting



\_

### **DESCRIPTION:**

The BL2S-LED fixture series is a high efficacy general purpose area light ideal for Barns, Farms, Security lighting, Industrial yards, Roadways and landscape lighting.

#### **FEATURES:**

- Rugged die cast aluminum housing with a polycarbonate lens.
- Corrosion resistant powder coat paint finish.
- Fixture is wattage adjustable with maximum wattage of 120W. Other wattage settings offered are 50W, 80W, and 100W
- Fixture delivers maximum of 16,700 lumens at an efficacy of 139 lumens per watt.
- Operates at a temperature of -40°C to +40°C.
- ANSI 3-pin with lock photocontrol included for automatic off during daylight hours. Comes with every standard fixture, included in box.
- Photocell can be removed when not needed and replaced with a shorting cap (sold separately).
- Galvanized iron arm is sold as an option for Arm mount installation on wall and pole.
- Ideal for mounting heights of 15' 25'.

SPECIFICATIONS	BL2S-LED120A50					
Maximum Watts (W)	120 16720 139.3 120-277V					
Maximum Lumens (Lm)						
Efficacy (Lm/W)						
Voltage						
Color Temp	5000K					
CRI	72					
Dimming	0-10V Dim to Off					
THD	<15%					
PF	0.9					
Beam Distribution	900					
LED Life @ 50,000 Hours	88.6%					
Housing Finish	Gray					
Housing Details	Die Cast Aluminum					
Lens Details	Polycarbonate Lens					
Mounting	Wall Mount, Pole Mount					
Power Supply Cord Length	1 m					
Operating Temp.	-40°C to +40°C					
Options Sold Separately	Galvanized Iron Arm					
Certifications	UL, Wet Location, IP65, 5 Year Warranty, DLC Premium					















## **DIMENSIONS:**

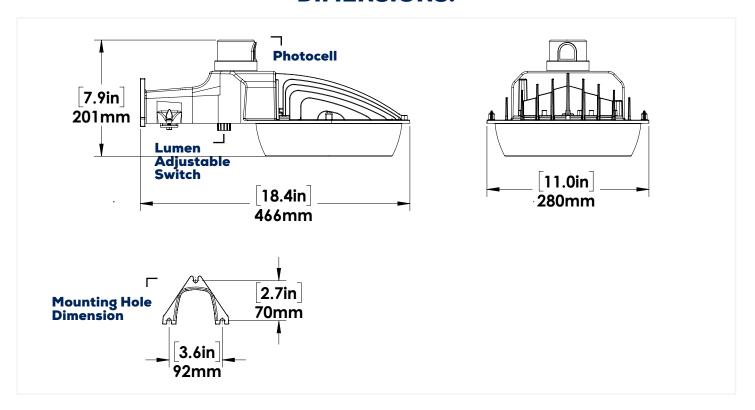

## **ARM DIMENSIONS:**

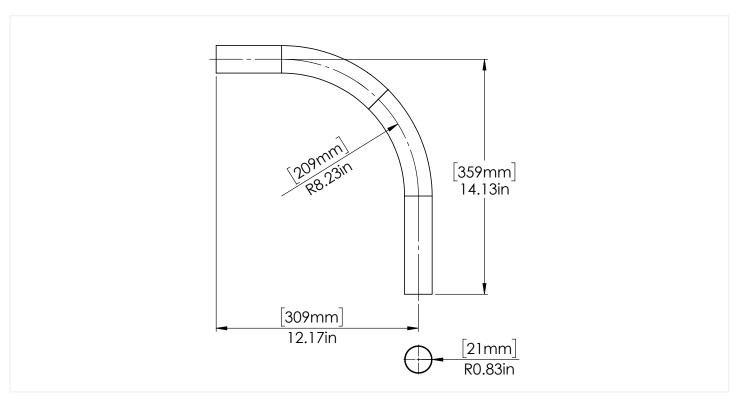



## **LUMEN ADJUSTABLE SWITCH:**

Lumens may be selected using adjustable switch installed on housing.

High output lumen adjustable fixture allows installer to select between 4 wattage settings: 50W/80W/100W/120W. Default setting of 120W.




	AMP	ERAGE [	DRAW &	SURGE I	PROTECTION	N		
	CURRENT (A)				SURGE PROTECTION			
	120V 208V 240V		277V		120-277V			
BL2S-LED	1.05A	0.61A	0.53A	0.46A		6kV		
TM-21 ESTIMATED LUMEN MAINTENACE								
	50,000 Hours		75,000 Hours		100,000 Hours			
BL2S-LED	88.6%		83.2%	78.1%				
LUMEN ADJUSTABLE SETTINGS								
Watts (W)		50		80	100	120		
Lumens (Lm)	6965		11143	13929	16720			
WEIGHT (lbs)								
BL2S-LED	8,87				_			


SPECIFICATIONS								
Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
BL2S-LED120A50-B-5K-XXX-DIM-PC	120-277	119	16347	137.8	15.0	0.900	5000	4-0-2



#### BL2S-LED120A50-B-5K-GRY-DIM-PC MOUNTED AT 20 FEET

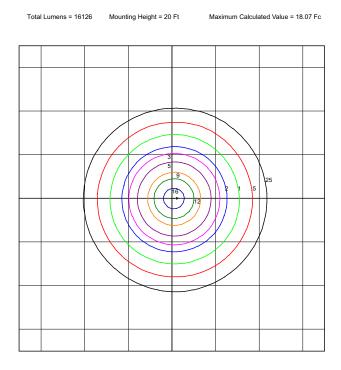

# **ORDERING GUIDE:**



STOCK CODE	DESCRIPTION
052563	BL2S-LED120A50-B-5K-GRY-DIM-PC

#### **ACCESSORIES SOLD SEPARATELY**

052564 - BL1S/2S ARM

051653 - SC-10 SHORTING CAP ALR