

Project Name:	Type:
Part Number:	Date:




GREENCREATIVE

NYX SERIES

SPECIFICATION FEATURES

- Mechanical** - NYX Downlight is made from die cast aluminum, for maximizing passive cooling, ensuring long life lasting LED. This series is designed for new construction, remodel, and direct mount (retrofit) in the ceiling. Stainless steel spring action clips allow for both easy new construction and direct installation from 1/2" to 1-1/2" ceiling thicknesses and field accessibility below the ceiling for service or replacement. Galvanized steel plaster frame. Low profile bar hangers with non-pass through construction and leveling flanges, contain integral tee bar clip and preinstalled nail. Bar hangers are adjustable from 13-1/4" to 24-1/2" and can be installed in suspended T-Grid or wood joist ceilings. Optional field installable butterfly brackets with adjustable height are available for C-Channel or rod installation.
- Electrical** - Proprietary potted driver for optimal heat protection ensure long life of electronics components. Field select from four or three lumen outputs using SelectDrive technology. The driver also features DualDim Technology, for maximum adaptability in any spaces whether it's commercial, residential or mixed. Rated for 120 to 277V, 50/60 Hz the driver is both 0-10V dimmable to 5% with low-end cut off and Forward and Reverse phase dimmable at 120V down to 10%. For 8" Large light engine, the 120V (DIM120V), 50/60 Hz driver is forward or reverse phase dimmable to 5%. The 120-277V (DIM010UNV), 50/60 Hz driver is 0-10V dimmable to 5% with a low end cutoff. Please consult dimmer compatibility for additional information. Sound rating <22db. Optional integrated EM driver available, and control options. Standard drivers DUALDIM and DIM010UNV also comes with a 12V auxiliary port that provides power for field installed sensors and control modules.
- Optical** - Non conductive polycarbonate plated reflectors available in clear, matte white, white baffle or black baffle, are field interchangeable allowing for service or replacement to evolve with the space. Fully deadfront reflector and flange are available in full clear, white, and black finishes. High resistance and non yellowing polycarbonate lenses for optimal low glare light diffusion. Featuring SelectKelvin technology with field selectable CCTs 2700/3000/3500/4000/5000K. LED binning within 4 SDCM maximum. Offered in minimum 90 CRI. 80° optical wide beam angle diffuser with 1.2 SC, 60° medium fresnel optic with 1.0 SC or wall wash insert are available for optimal distribution.
- Thermal** - Die cast fixture maximizes passive thermal management and achieves a L70 calculated lifetime of 100,000 hours, at 25°C according to TM-21-11 requirements. Ambient temperature rated from -40°F to 113°F (-40°C to 45°C). IC installation for IC rated parts limited to +35°C (95.0°F) ambient temperature. IC cover are also available.
- Compliance and Warranty** - ETL Classified and Listed for wet location from the bottom once properly installed. Certified air-tight per ASTM 283-04. Complies with FCC 47CFR Part 15B consumer limits for EMI/RFI emissions at 120V. Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements. For IC rating information please refer to the IC rating table. Can be used for State of California Title 24 high efficacy LED compliance under JA8. 5 Year Warranty for complete fixture. Optional 10 Year Extended Warranty available, subject to same terms, conditions and installation requirements as standard 5 Year Warranty. BAA Compliant Option Available.

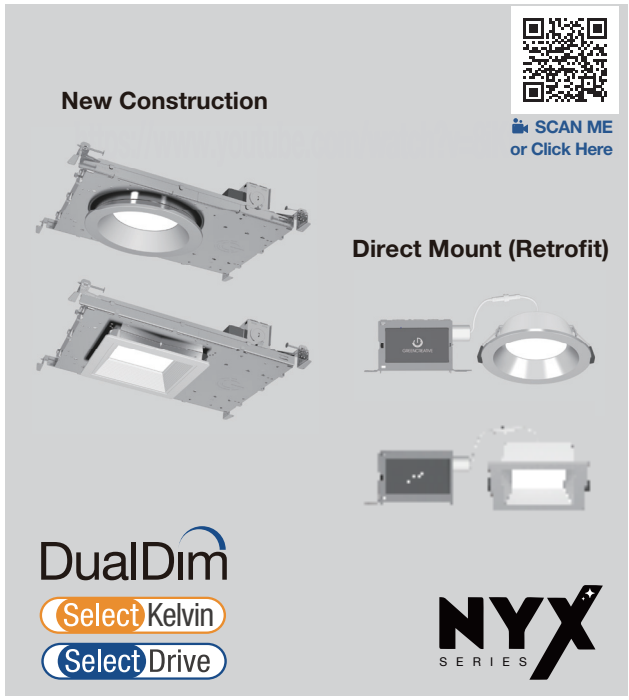

121824



BENEFITS

- SelectDrive technology allows to select from 3 or 4 lumen outputs
- NYX provides the easiest retrofitting or new installation dimming compatibility with DualDim technology
- Install virtually anywhere with Wet Location, IC rated models and Air-tight ratings
- Multiple finishes and beam available to match your most demanding design requirement
- Long life time in high ambient temperature range installation
- Quick and easy installation for both new construction or direct mount

APPLICATIONS

- Commercial
- Retail
- Hospitality
- Education



NYX SERIES

ORDERING INFORMATION

Ordering Example: NYXNC6RD/S9CCT5S/DUALDIM/MD/CC

NYX				/		9	CCT5S	/	
Series	Installation Type	Size	Style	Lumen ⁸		CRI	CCT ⁹	Driver	
<input type="checkbox"/> NYX NYX Series downlights	<input type="checkbox"/> NC New Construction Frame	<input type="checkbox"/> 4 4"	<input type="checkbox"/> RD Round	<input type="checkbox"/> S Small Selectable XL/L/M/H 700/1000/1500/2000lm		<input type="checkbox"/> 9 90+ CRI	<input type="checkbox"/> CCT5S Selectable 2700 /3000/3500 /4000/5000K	<input type="checkbox"/> DUALDIM 120V-277V, 50/60Hz. 0-10V or Forward/Reverse phase dimming at 120V only.	
	<input type="checkbox"/> ICAT¹ New Construction with IC cover	<input type="checkbox"/> 6 6"	<input type="checkbox"/> SQ Square	<input type="checkbox"/> M Medium Selectable L/M/H 2500/3000/4000lm				<input type="checkbox"/> DIM010UNV⁵ SelectDrive 120-277V, 50/60Hz 0-10V dimming	
	<input type="checkbox"/> DM Direct Mount, Remodel	<input type="checkbox"/> 8³ 8"		<input type="checkbox"/> L⁴ Large Selectable L/M/H 4000/5000/6000lm				<input type="checkbox"/> DIM120V⁷ SelectDrive 120V, 50/60Hz Forward/Reverse Phase dimming	
				<input type="checkbox"/> Fxx⁸ Fixed Lumens xx= 07, 10, 15, 20, 25, 30, 40, 50, 60					
Optic			Reflector and Flange			Options			
<input type="checkbox"/> WD Wide 80° Nominal Distribution 1.2 SC/H			<input type="checkbox"/> CW Clear Reflector with White Flange			<input type="checkbox"/> EM6 Factory Installed 6W Emergency Driver			
<input type="checkbox"/> MD Medium 60° Nominal Distribution 1.0 SC/H			<input type="checkbox"/> CC Clear Reflector with Clear Flange (Dead Front)			<input type="checkbox"/> AWNRR Lutron Athena Node			
<input type="checkbox"/> WW² Wall Wash			<input type="checkbox"/> WW White Reflector with White Flange (Dead Front)			<input type="checkbox"/> BAA BAA Compliant Option			
			<input type="checkbox"/> BB⁶ Black Reflector with Black Flange (Dead Front)						
			<input type="checkbox"/> WBW White Baffle Reflector with White Flange						
			<input type="checkbox"/> BBW Black Baffle Reflector with White Flange						

- IC cover is mandatory for IC rating on 4" S round and S Square CC, WW and BB (dead front) reflectors, and 6" and 8" M light engine. All other 4", 6" S models are ICAT rated without frame cover. 8" L Light Engine, 4" M Square Light engine, and 6" M Square Light engine are not IC rated.
- Only available in Clear or Matte White finish. Not compatible with BB, WBW and BBW reflectors.
- 8" only available in Round Style
- Large Selectable light engine is only available for 8" and in dedicated dimming DIM010UNV or DIM120V.
- Dedicated dimming DIM010UNV or DIM120V is only available for 8" L light engine.
- Black Reflector and Flange are Made To Order, maybe subject to longer lead time. Please contact factory.
- 8" Large light engine DIM120V is Made To Order, maybe subject to longer lead time. Please contact factory.
- For Fixed Lumen output, the driver will be set at the right current for the lumen selected (F07=700lm, F10=1000lm, ..., F60=6000lm). F25 and above are not available for 4" Round, 4" Square, or 6" Square Style. F25 to F40, are exclusively available for 6" Round and 8" Round options. F50 (5000lm) and F60 (6000lm) are exclusively available for 8" and in DIM120V or DIM010UNV. Fixed lumen output light engine is Made To Order and subject to longer lead time, please contact factory.
- Factory setting at highest lumen output and 3500K for selectable lumen outputs and CCT options.

REFLECTOR STYLE



TECHNICAL INFORMATION

Product	Dimming	Input Voltage	Input Frequency	Max Input Current	Max Input Power	THD Power	Power Factor	Flicker Index	Sound Rating
4" Round S (7.5/10/15/22)	0-10V and ELV/TRIAC	120-277V	50-60Hz	230mA	22W	<20%	>0.9	<30%	<22db
4" Square S (7.5/10/15/22)									
4" Round M (25/30/40)									
4" Square M (25/30/40)									
6" Round S (7.5/10/15/22)									
6" Square S (7.5/10/15/22)									
6" Round M (25/30/40)									
6" Square M (25/30/40)									
8" Round S (7.5/10/15/22)									
8" Round M (25/30/40)									
8" Round L (40/50/60)									
620mA									



NYX SERIES

NOMINAL PERFORMANCE

























Type	Wattage (W)	2700K / CRI90		3000K / CRI90		3500K / CRI90		4000K / CRI90		5000K / CRI90	
		Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)	Lumens (lm)	Efficacy (LPW)
4" Round S (7.5/10/15/22) With Reflector	7.5	694	93	712	95	740	99	750	100	750	100
	10	925	93	950	95	985	99	1,000	100	1,000	100
	15	1,387	92	1,425	95	1,481	99	1,500	100	1,500	100
	22	2,050	93	2,050	93	2,150	98	2,150	98	2,150	98
4" Square S (7.5/10/15/22) With Reflector	7.5	675	90	695	93	720	96	730	97	740	99
	10	900	90	925	93	960	96	975	98	987	99
	15	1,350	90	1,385	92	1,440	96	1,460	97	1,480	99
	22	1,950	89	1,950	89	2,050	93	2,050	93	2,050	93
6" Round S (7.5/10/15/22) With Reflector	7.5	703	94	722	96	750	100	750	100	750	100
	10	938	94	963	96	1,000	100	1,000	100	1,000	100
	15	1,406	94	1,444	96	1,500	100	1,500	100	1,500	100
	22	2,050	93	2,050	93	2,150	98	2,150	98	2,150	98
6" Square S (7.5/10/15/22) With Reflector	7.5	703	94	722	96	750	100	750	100	750	100
	10	938	94	963	96	1,000	100	1,000	100	1,000	100
	15	1,406	94	1,444	96	1,500	100	1,500	100	1,500	100
	22	2,050	93	2,050	93	2,150	98	2,150	98	2,150	98
6" and 4" Round M (25/30/40) With Reflector	25	2,350	94	2,400	96	2,500	100	2,500	100	2,500	100
	30	2,800	93	2,900	97	3,000	100	3,000	100	3,000	100
	41	3,900	95	3,900	95	4,100	100	4,100	100	4,100	100
6" and 4" Square M (25/30/40) With Reflector	25	2,350	94	2,400	96	2,500	100	2,500	100	2,500	100
	30	2,800	93	2,900	97	3,000	100	3,000	100	3,000	100
	41	3,900	95	3,900	95	4,100	100	4,100	100	4,100	100
8" Round L (40/50/60) With Reflector	40	3,800	95	3,900	98	4,000	100	4,000	100	4,000	100
	50	4,800	96	4,900	98	5,000	100	5,000	100	5,000	100
	60	5,600	93	5,800	97	6,000	100	6,000	100	6,000	100

REFLECTOR FINISH MULTIPLIERS

Product	Clear	Matte White	White Baffle	Black Baffle
Multipliers ¹	1.0	1.02	0.98	0.82

1. Multipliers for relative lumen values with other reflector finishes

IC RATING


Reflector And Flange						
Light Engine						
	CW	CC	WW	BB	WBW	BBW
4" Round S (7.5/10/15/20)	 IC standard	 With Shallow IC Cover	 With Shallow IC Cover	 With Shallow IC Cover	 IC standard	 IC standard
4" Square S (7.5/10/15/20)	 IC standard	 With Shallow IC Cover	 With Shallow IC Cover	 With Shallow IC Cover	 IC standard	 IC standard



NYX SERIES

IC RATING						
Reflector And Flange	CW	CC	WW	BB	WBW	BBW
Light Engine	CW	CC	WW	BB	WBW	BBW
6" Round S (7.5/10/15/20)	IC standard	IC standard	IC standard	IC standard	IC standard	IC standard
6" Square S (7.5/10/15/20)	IC standard	IC standard	IC standard	IC standard	IC standard	IC standard
6" Round M (25/30/40)	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover
8" Round M (25/30/40)	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover	With Large IC Cover
8" Round M (25/30/40)	IC standard	IC standard	IC standard	IC standard	IC standard	IC standard

LINE DRAWINGS

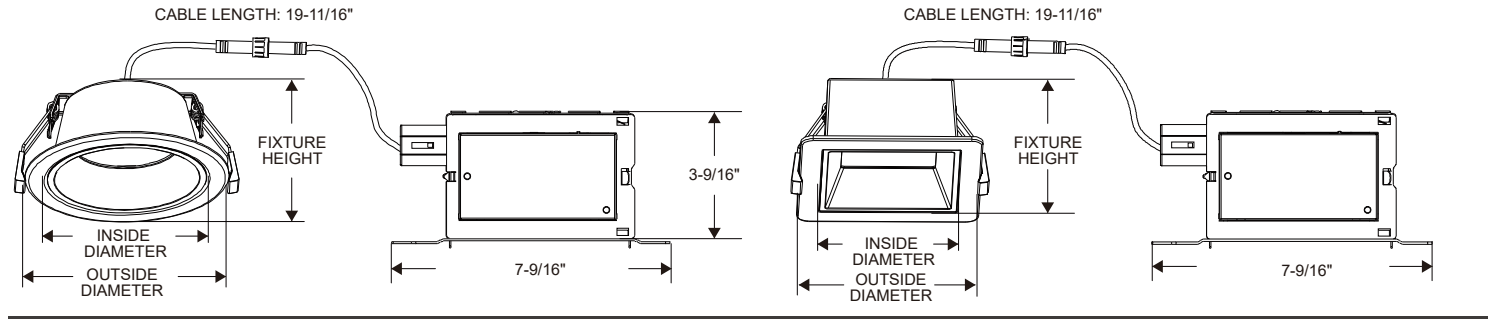


	Size	Inside Diameter	Outside Trim Diameter	Fixture Height	Minimum Cutout	Maximum Cutout
NYX ROUND	4	3-15/16"	5-1/2"	2-1/2"	4-1/2"	4-3/4"
	6	5-1/2"	7-1/16"	2-1/2"	6 1/16"	6-5/16"
	8	7-1/16"	8-11/16"	2-9/16"	7-11/16"	8-1/16"
NYX SQUARE	4	3-3/8x3-3/8"	4-7/8x4-7/8"	2-1/2"	4x4"	4-1/8x4-1/8"
	6	4-13/16x4-13/16"	6-3/8x6-3/8"	2-1/2"	5-5/16x5-5/16"	5-5/8x5-5/8"




NYX SERIES




LINE DRAWINGS

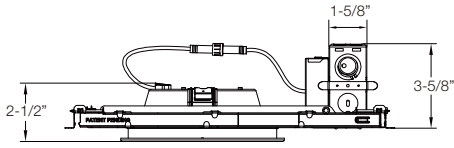


**4" S, 6" and 8" Round Frame
(shown with 6" Light Engine)**

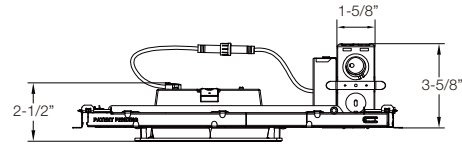



**4" S and 6" Square Frame
(shown with 6" Light Engine)**

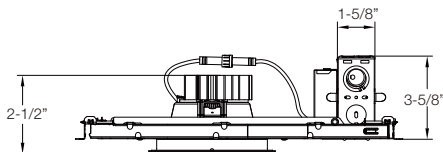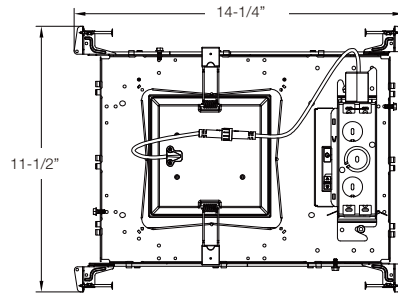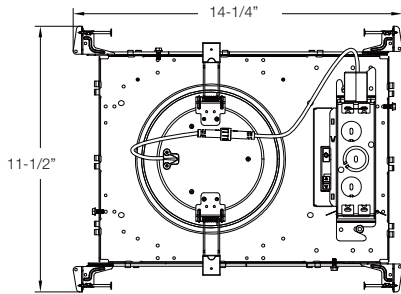

**4" M Round Frame
(shown with 6" Light Engine)**

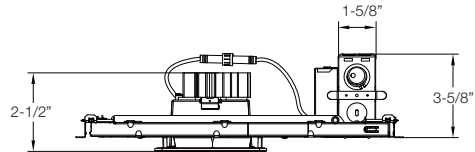

**4" M Square Frame
(shown with 6" Light Engine)**

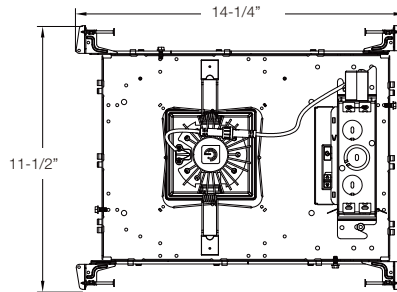
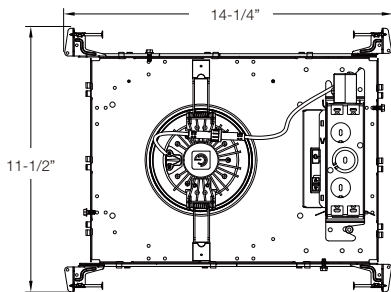




NYX SERIES



LINE DRAWINGS

With Shallow IC BOX

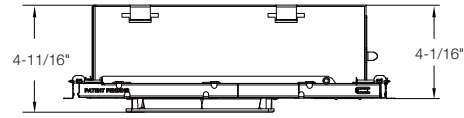
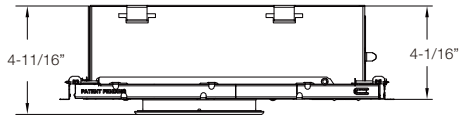


4", 6" and 8" Round S Lumen Shallow IC Frame Cover (shown with 6" Light Engine)

4" and 6" Square S Lumen Shallow IC Frame Cover (shown with 6" Light Engine)

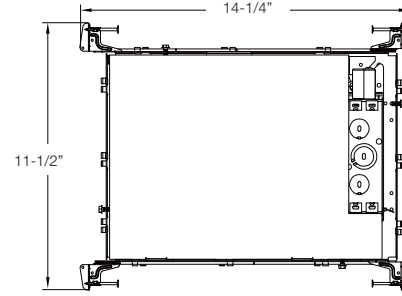
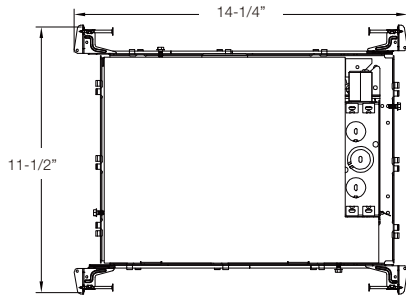


With Large IC Box

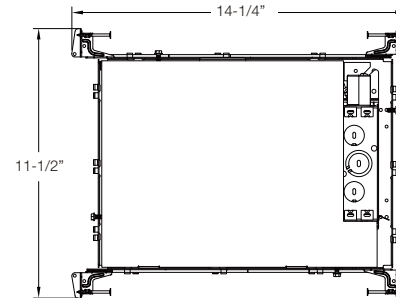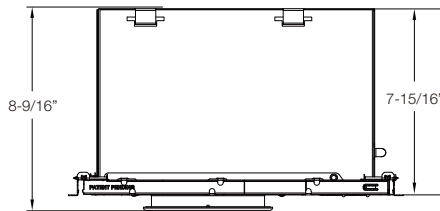



6" and 8" Round M Lumen Large IC Frame Cover (shown with 6" Light Engine)

With EM

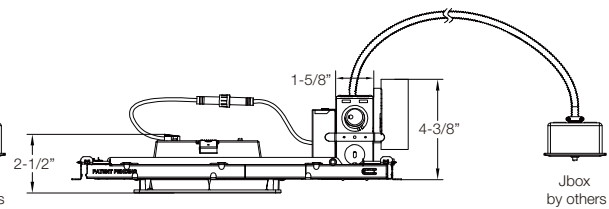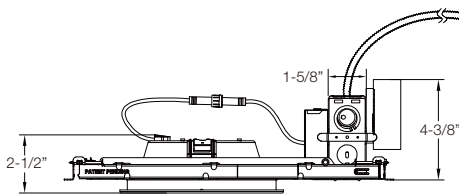

4", 6" and 8" Round Frame with EM6 (shown with 6" Light Engine)

4" and 6" Square Frame with EM6 (shown with 6" Light Engine)

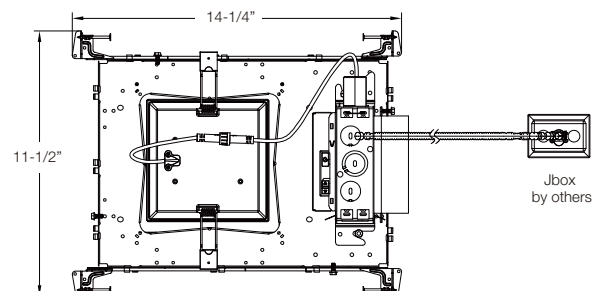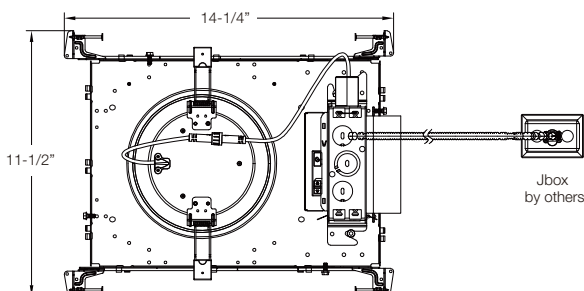




NYX SERIES



LINE DRAWINGS

With EM & IC BOX

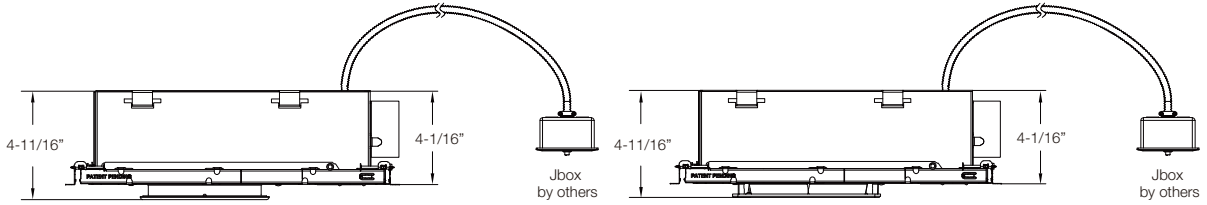


4" , 6" and 8" Round S Lumen Shallow IC Frame Cover with EM6
(shown with 6" Light Engine)

4" and 6" Square S Lumen Shallow IC Frame Cover with EM6
(shown with 6" Light Engine)

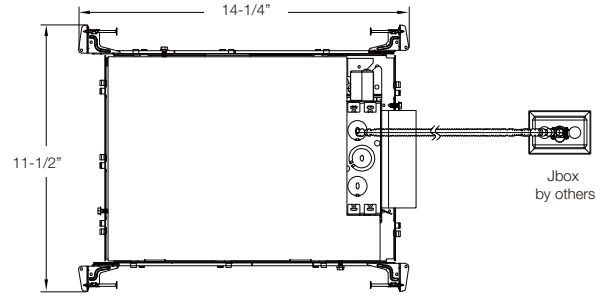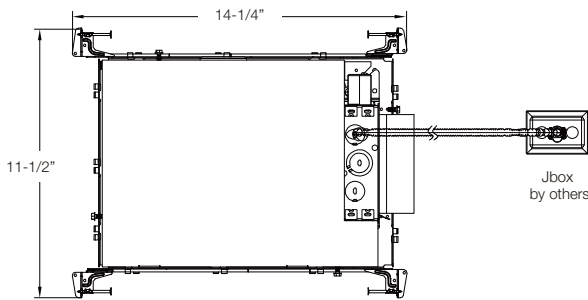





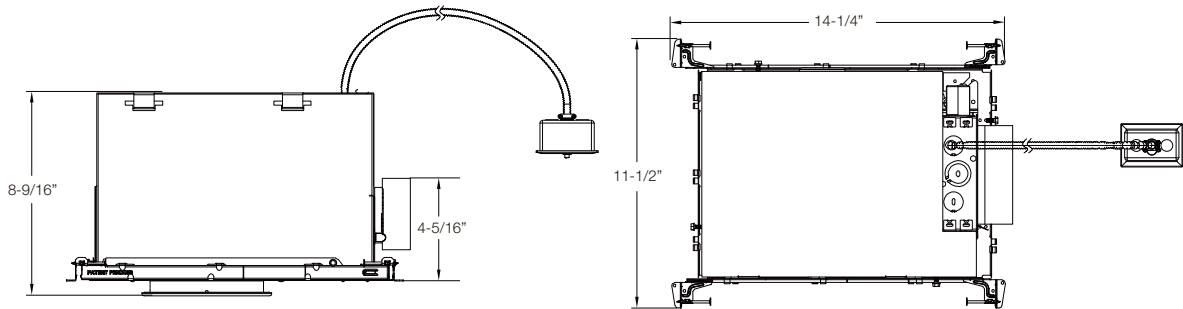











With EM & IC BOX



4" , 6" and 8" Round M Lumen Large IC Frame Cover with EM6
(shown with 6" Light Engine)

NYX SERIES

ACCESSORY ORDERING INFORMATION				
Product	Model	Description	Pictures	Dimensions
35126	NCFBFB	Field Installable Butterfly Brackets (pair of 2) For New Construction Frame		
35125 ¹	NCFEMB ¹	Field Installable Brackets For emergency Driver or Inverter with New Construction Frame		
98568	GOOFRING6	6" Goof Ring - Outer Diameter 10-1/2"		
98567	GOOFRING8	8" Goof Ring - Outer Diameter 12-1/2"		
37934	8EMINVERTER	California Title 20 Compliant 8W Emergency LED Inverter (Field Installation)		
37935	21EMINVERTER	California Title 20 Compliant 21W Emergency LED Inverter (Field Installation)		
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)		
FHUPS1-UNV-25L-SD	FHUPS1-UNV-25L-SD	25W Emergency Micro Inverter for field installation to use with 0-10V Driver options. 100-277VAC (up to 150W with use of 0-10V dimming). CEC Compliant		

¹ Only needed for field installable emergency driver/inverter

Note: For details of compatibility between each emergency solution and specific product models, please refer to the Products Emergency Compatibility Matrix file available on <https://greencreative.com/emergency-accessories/>



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
96677	NYXNC6RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96678	NYXNC6RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96679	NYXNC6RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96680	NYXNC6RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96681	NYXNC6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
96682	NYXICAT6RD/M9CCT5S/DUALDIM/WD/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
96683	NYXICAT6RD/M9CCT5S/DUALDIM/WD/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96684	NYXICAT6RD/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
96685	NYXICAT6RD/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96686	NYXICAT6RD/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96687	NYXICAT6RD/M9CCT5S/DUALDIM/MD/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96688	NYXICAT6RD/M9CCT5S/DUALDIM/MD/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96689	NYXICAT6RD/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96690	NYXICAT6RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96691	NYXICAT6RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96692	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96693	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96694	NYXICAT6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction ICAT 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37702	NYXNC8RD/S9CCT5S/DUALDIM/WD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37703	NYXNC8RD/S9CCT5S/DUALDIM/WD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37704	NYXNC8RD/S9CCT5S/DUALDIM/WD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37705	NYXNC8RD/S9CCT5S/DUALDIM/WD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37706	NYXNC8RD/S9CCT5S/DUALDIM/WD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37707	NYXNC8RD/S9CCT5S/DUALDIM/MD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37708	NYXNC8RD/S9CCT5S/DUALDIM/MD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37709	NYXNC8RD/S9CCT5S/DUALDIM/MD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37710	NYXNC8RD/S9CCT5S/DUALDIM/MD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37711	NYXNC8RD/S9CCT5S/DUALDIM/MD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37712	NYXNC8RD/S9CCT5S/DUALDIM/WWW/CW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37713	NYXNC8RD/S9CCT5S/DUALDIM/WWW/CC	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37714	NYXNC8RD/S9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37715	NYXNC8RD/M9CCT5S/DUALDIM/WD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37716	NYXNC8RD/M9CCT5S/DUALDIM/WD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37717	NYXNC8RD/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
37718	NYXNC8RD/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37719	NYXNC8RD/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37720	NYXNC8RD/M9CCT5S/DUALDIM/MD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37721	NYXNC8RD/M9CCT5S/DUALDIM/MD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37722	NYXNC8RD/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37723	NYXNC8RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37724	NYXNC8RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37725	NYXNC8RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37726	NYXNC8RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37727	NYXNC8RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 8" Round Downlight, Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37728	NYXNC8RD/L9CCT5S/DIM010UNV/WD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Clear Reflector White Flange
37729	NYXNC8RD/L9CCT5S/DIM010UNV/WD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Clear Reflector Clear Flange (Dead Front)
37730	NYXNC8RD/L9CCT5S/DIM010UNV/WD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, White Reflector White Flange (Dead Front)
37731	NYXNC8RD/L9CCT5S/DIM010UNV/WD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, White Baffle Reflector White Flange
37732	NYXNC8RD/L9CCT5S/DIM010UNV/WD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Black Baffle Reflector White Flange
37733	NYXNC8RD/L9CCT5S/DIM010UNV/MD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Clear Reflector White Flange
37734	NYXNC8RD/L9CCT5S/DIM010UNV/MD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Clear Reflector Clear Flange (Dead Front)
37735	NYXNC8RD/L9CCT5S/DIM010UNV/MD/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, White Reflector White Flange (Dead Front)
37736	NYXNC8RD/L9CCT5S/DIM010UNV/MD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, White Baffle Reflector White Flange
37737	NYXNC8RD/L9CCT5S/DIM010UNV/MD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Black Baffle Reflector White Flange
37738	NYXNC8RD/L9CCT5S/DIM010UNV/WWW/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash Clear, White Flange
37739	NYXNC8RD/L9CCT5S/DIM010UNV/WWW/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash Clear, Clear Flange
37740	NYXNC8RD/L9CCT5S/DIM010UNV/WWW/WWW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash White, White Flange
37741	NYXICAT8RD/M9CCT5S/DUALDIM/WD/CW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37742	NYXICAT8RD/M9CCT5S/DUALDIM/WD/CC	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37743	NYXICAT8RD/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37744	NYXICAT8RD/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37745	NYXICAT8RD/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37746	NYXICAT8RD/M9CCT5S/DUALDIM/MD/CW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37747	NYXICAT8RD/M9CCT5S/DUALDIM/MD/CC	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37748	NYXICAT8RD/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37749	NYXICAT8RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37750	NYXICAT8RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37751	NYXICAT8RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
37752	NYXICAT8RD/M9CCT5S/DUALDIM/WW/CC	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37753	NYXICAT8RD/M9CCT5S/DUALDIM/WW/WW	NYX New Construction ICAT 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37754	NYXDM8RD/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37755	NYXDM8RD/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37756	NYXDM8RD/S9CCT5S/DUALDIM/WD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37757	NYXDM8RD/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37758	NYXDM8RD/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37759	NYXDM8RD/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37760	NYXDM8RD/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37761	NYXDM8RD/S9CCT5S/DUALDIM/MD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37762	NYXDM8RD/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37763	NYXDM8RD/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37764	NYXDM8RD/S9CCT5S/DUALDIM/WW/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37765	NYXDM8RD/S9CCT5S/DUALDIM/WW/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37766	NYXDM8RD/S9CCT5S/DUALDIM/WW/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37767	NYXDM8RD/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37768	NYXDM8RD/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37769	NYXDM8RD/M9CCT5S/DUALDIM/WD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37770	NYXDM8RD/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37771	NYXDM8RD/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37772	NYXDM8RD/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37773	NYXDM8RD/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37774	NYXDM8RD/M9CCT5S/DUALDIM/MD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37775	NYXDM8RD/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37776	NYXDM8RD/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37777	NYXDM8RD/M9CCT5S/DUALDIM/WW/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37778	NYXDM8RD/M9CCT5S/DUALDIM/WW/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37779	NYXDM8RD/M9CCT5S/DUALDIM/WW/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37780	NYXDM8RD/L9CCT5S/DIM010UNV/WD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Clear Reflector White Flange
37781	NYXDM8RD/L9CCT5S/DIM010UNV/WD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Clear Reflector Clear Flange (Dead Front)
37782	NYXDM8RD/L9CCT5S/DIM010UNV/WD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, White Reflector White Flange (Dead Front)
37783	NYXDM8RD/L9CCT5S/DIM010UNV/WD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, White Baffle Reflector White Flange
37784	NYXDM8RD/L9CCT5S/DIM010UNV/WD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wide Beam, Black Baffle Reflector White Flange
37785	NYXDM8RD/L9CCT5S/DIM010UNV/MD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Clear Reflector White Flange"



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
37786	NYXDM8RD/L9CCT5S/DIM010UNV/MD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Clear Reflector Clear Flange (Dead Front)
37787	NYXDM8RD/L9CCT5S/DIM010UNV/MD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, White Reflector White Flange (Dead Front)
37788	NYXDM8RD/L9CCT5S/DIM010UNV/MD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, White Baffle Reflector White Flange
37789	NYXDM8RD/L9CCT5S/DIM010UNV/MD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Medium Beam, Black Baffle Reflector White Flange
37790	NYXDM8RD/L9CCT5S/DIM010UNV/WW/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash Clear, White Flange
37791	NYXDM8RD/L9CCT5S/DIM010UNV/WW/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash Clear, Clear Flange
37792	NYXDM8RD/L9CCT5S/DIM010UNV/WW/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V Wall Wash White, White Flange
38226	NYXNC8RD/L9CCT5S/DIM120V/WD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Clear Reflector White Flange
38227	NYXNC8RD/L9CCT5S/DIM120V/WD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Clear Reflector Clear Flange (Dead Front)
38228	NYXNC8RD/L9CCT5S/DIM120V/WD/WW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, White Reflector White Flange (Dead Front)
38229	NYXNC8RD/L9CCT5S/DIM120V/WD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, White Baffle Reflector White Flange
38230	NYXNC8RD/L9CCT5S/DIM120V/WD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Black Baffle Reflector White Flange
38231	NYXNC8RD/L9CCT5S/DIM120V/MD/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, Clear Reflector White Flange
38232	NYXNC8RD/L9CCT5S/DIM120V/MD/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, Clear Reflector Clear Flange (Dead Front)
38233	NYXNC8RD/L9CCT5S/DIM120V/MD/WW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, White Reflector White Flange (Dead Front)
38234	NYXNC8RD/L9CCT5S/DIM120V/MD/WBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, White Baffle Reflector White Flange
38235	NYXNC8RD/L9CCT5S/DIM120V/MD/BBW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, Black Baffle Reflector White Flange
38236	NYXNC8RD/L9CCT5S/DIM120V/WW/CW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash Clear, White Flange
38237	NYXNC8RD/L9CCT5S/DIM120V/WW/CC	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash Clear, Clear Flange
38238	NYXNC8RD/L9CCT5S/DIM120V/WW/WW	NYX New Construction 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash White, White Flange
38239	NYXDM8RD/L9CCT5S/DIM120V/WD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Clear Reflector White Flange
38240	NYXDM8RD/L9CCT5S/DIM120V/WD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Clear Reflector Clear Flange (Dead Front)
38241	NYXDM8RD/L9CCT5S/DIM120V/WD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, White Reflector White Flange (Dead Front)
38242	NYXDM8RD/L9CCT5S/DIM120V/WD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, White Baffle Reflector White Flange
38243	NYXDM8RD/L9CCT5S/DIM120V/WD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Black Baffle Reflector White Flange
38244	NYXDM8RD/L9CCT5S/DIM120V/MD/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wide Beam, Black Baffle Reflector White Flange
38245	NYXDM8RD/L9CCT5S/DIM120V/MD/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, Clear Reflector Clear Flange (Dead Front)
38246	NYXDM8RD/L9CCT5S/DIM120V/MD/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, White Reflector White Flange (Dead Front)
38247	NYXDM8RD/L9CCT5S/DIM120V/MD/WBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, White Baffle Reflector White Flange
38248	NYXDM8RD/L9CCT5S/DIM120V/MD/BBW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Medium Beam, Black Baffle Reflector White Flange
38249	NYXDM8RD/L9CCT5S/DIM120V/WW/CW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash Clear, White Flange
38250	NYXDM8RD/L9CCT5S/DIM120V/WW/CC	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash Clear, Clear Flange
38251	NYXDM8RD/L9CCT5S/DIM120V/WW/WW	NYX Direct Mount 8" Round Downlight Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, ELV/TRIAC Dimming Wall Wash White, White Flange
96695	NYXNC4SQ/S9CCT5S/DUALDIM/WD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic) 4 pcs (frame)

Product	Model	Description
96696	NYXNC4SQ/S9CCT5S/DUALDIM/WD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96697	NYXNC4SQ/S9CCT5S/DUALDIM/WD/WW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
96698	NYXNC4SQ/S9CCT5S/DUALDIM/WD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96699	NYXNC4SQ/S9CCT5S/DUALDIM/WD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96700	NYXNC4SQ/S9CCT5S/DUALDIM/MD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96701	NYXNC4SQ/S9CCT5S/DUALDIM/MD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96702	NYXNC4SQ/S9CCT5S/DUALDIM/MD/WW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96703	NYXNC4SQ/S9CCT5S/DUALDIM/MD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96704	NYXNC4SQ/S9CCT5S/DUALDIM/MD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96705	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/CW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96706	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/CC	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96707	NYXNC4SQ/S9CCT5S/DUALDIM/WWW/WW	NYX New Construction 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
96708	NYXNC6SQ/S9CCT5S/DUALDIM/WD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
96709	NYXNC6SQ/S9CCT5S/DUALDIM/WD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
96710	NYXNC6SQ/S9CCT5S/DUALDIM/WD/WW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
96711	NYXNC6SQ/S9CCT5S/DUALDIM/WD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
96712	NYXNC6SQ/S9CCT5S/DUALDIM/WD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
96713	NYXNC6SQ/S9CCT5S/DUALDIM/MD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
96714	NYXNC6SQ/S9CCT5S/DUALDIM/MD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
96715	NYXNC6SQ/S9CCT5S/DUALDIM/MD/WW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
96716	NYXNC6SQ/S9CCT5S/DUALDIM/MD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
96717	NYXNC6SQ/S9CCT5S/DUALDIM/MD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
96718	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/CW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
96719	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/CC	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
96720	NYXNC6SQ/S9CCT5S/DUALDIM/WWW/WW	NYX New Construction 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

37494	NYXDM4RD/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37495	NYXDM4RD/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37496	NYXDM4RD/S9CCT5S/DUALDIM/WD/WW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37497	NYXDM4RD/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37498	NYXDM4RD/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37499	NYXDM4RD/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37500	NYXDM4RD/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37501	NYXDM4RD/S9CCT5S/DUALDIM/MD/WW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
37502	NYXDM4RD/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37503	NYXDM4RD/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37504	NYXDM4RD/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37505	NYXDM4RD/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37506	NYXDM4RD/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37507	NYXDM6RD/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37508	NYXDM6RD/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37509	NYXDM6RD/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37510	NYXDM6RD/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37511	NYXDM6RD/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37512	NYXDM6RD/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37513	NYXDM6RD/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37514	NYXDM6RD/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37515	NYXDM6RD/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37516	NYXDM6RD/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37517	NYXDM6RD/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37518	NYXDM6RD/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37519	NYXDM6RD/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37520	NYXDM6RD/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37521	NYXDM6RD/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37522	NYXDM6RD/M9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37523	NYXDM6RD/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37524	NYXDM6RD/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37525	NYXDM6RD/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37526	NYXDM6RD/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37527	NYXDM6RD/M9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37528	NYXDM6RD/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37529	NYXDM6RD/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37530	NYXDM6RD/M9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37531	NYXDM6RD/M9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37532	NYXDM6RD/M9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Round Downlight Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37533	NYXDM4SQ/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37534	NYXDM4SQ/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37535	NYXDM4SQ/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
37536	NYXDM4SQ/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37537	NYXDM4SQ/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37538	NYXDM4SQ/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37539	NYXDM4SQ/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37540	NYXDM4SQ/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37541	NYXDM4SQ/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37542	NYXDM4SQ/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37543	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37544	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37545	NYXDM4SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
37546	NYXDM6SQ/S9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
37547	NYXDM6SQ/S9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
37548	NYXDM6SQ/S9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Reflector White Flange (Dead Front)
37549	NYXDM6SQ/S9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, White Baffle Reflector White Flange
37550	NYXDM6SQ/S9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Black Baffle Reflector White Flange
37551	NYXDM6SQ/S9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector White Flange
37552	NYXDM6SQ/S9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Clear Reflector Clear Flange (Dead Front)
37553	NYXDM6SQ/S9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Reflector White Flange (Dead Front)
37554	NYXDM6SQ/S9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, White Baffle Reflector White Flange
37555	NYXDM6SQ/S9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Medium Beam, Black Baffle Reflector White Flange
37556	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, White Flange
37557	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash Clear, Clear Flange
37558	NYXDM6SQ/S9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wall Wash White, White Flange
38455	NYXNC4RD/M9CCT5S/DUALDIM/WD/CW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38456	NYXNC4RD/M9CCT5S/DUALDIM/WD/CC	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
38457	NYXNC4RD/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38458	NYXNC4RD/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38459	NYXNC4RD/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38460	NYXNC4RD/M9CCT5S/DUALDIM/WD/BB	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38461	NYXNC4RD/M9CCT5S/DUALDIM/MD/CW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38462	NYXNC4RD/M9CCT5S/DUALDIM/MD/CC	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38463	NYXNC4RD/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38464	NYXNC4RD/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38465	NYXNC4RD/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 4" Round DownlightSelectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
38466	NYXNC4RD/M9CCT5S/DUALDIM/MD/BB	NYX New Construction 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38467	NYXNC4RD/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front) Wall Wash Clear, White Flange
38468	NYXNC4RD/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38469	NYXNC4RD/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange
38485	NYXNC4SQ/M9CCT5S/DUALDIM/WD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38486	NYXNC4SQ/M9CCT5S/DUALDIM/WD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
38487	NYXNC4SQ/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38488	NYXNC4SQ/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38489	NYXNC4SQ/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38490	NYXNC4SQ/M9CCT5S/DUALDIM/WD/BB	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38491	NYXNC4SQ/M9CCT5S/DUALDIM/MD/CW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38492	NYXNC4SQ/M9CCT5S/DUALDIM/MD/CC	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38493	NYXNC4SQ/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38494	NYXNC4SQ/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38495	NYXNC4SQ/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange
38496	NYXNC4SQ/M9CCT5S/DUALDIM/MD/BB	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38497	NYXNC4SQ/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38498	NYXNC4SQ/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38499	NYXNC4SQ/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange
38500	NYXNC6SQ/M9CCT5S/DUALDIM/WD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38501	NYXNC6SQ/M9CCT5S/DUALDIM/WD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector Clear Flange (Dead Front)
38502	NYXNC6SQ/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38503	NYXNC6SQ/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38504	NYXNC6SQ/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38505	NYXNC6SQ/M9CCT5S/DUALDIM/WD/BB	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38506	NYXNC6SQ/M9CCT5S/DUALDIM/MD/CW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38507	NYXNC6SQ/M9CCT5S/DUALDIM/MD/CC	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38508	NYXNC6SQ/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38509	NYXNC6SQ/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38510	NYXNC6SQ/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38511	NYXNC6SQ/M9CCT5S/DUALDIM/MD/BB	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38512	NYXNC6SQ/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38513	NYXNC6SQ/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38514	NYXNC6SQ/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
38530	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/CW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38531	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/CC	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector Clear Flange (Dead Front)
38532	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/WWW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38533	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/WBW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38534	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/BBW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38535	NYXICAT6SQ/M9CCT5S/DUALDIM/WD/BB	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38536	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/CW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38537	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/CC	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38538	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/WWW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38539	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/WBW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38540	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/BBW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange
38541	NYXICAT6SQ/M9CCT5S/DUALDIM/MD/BB	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38542	NYXICAT6SQ/M9CCT5S/DUALDIM/WWW/CW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38543	NYXICAT6SQ/M9CCT5S/DUALDIM/WWW/CC	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K ,Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38544	NYXICAT6SQ/M9CCT5S/DUALDIM/WWW/WWW	NYX New Construction Large IC 6" Square Downlight Selectable Lumen 4000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange
38545	NYXDM4RD/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector White Flange
38546	NYXDM4RD/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac, Wide Beam, Clear Reflector Clear Flange (Dead Front)
38547	NYXDM4RD/M9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38548	NYXDM4RD/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38549	NYXDM4RD/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38550	NYXDM4RD/M9CCT5S/DUALDIM/WD/BB	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38551	NYXDM4RD/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38552	NYXDM4RD/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38553	NYXDM4RD/M9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38554	NYXDM4RD/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38555	NYXDM4RD/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange
38556	NYXDM4RD/M9CCT5S/DUALDIM/MD/BB	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector White Flange
38557	NYXDM4RD/M9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38558	NYXDM4RD/M9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38559	NYXDM4RD/M9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Round Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange
38560	NYXDM4SQ/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38561	NYXDM4SQ/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector Clear Flange (Dead Front)
38562	NYXDM4SQ/M9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38563	NYXDM4SQ/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange



NYX SERIES

SALES KIT ORDERING GUIDE

Case Quantity: 12 pcs (light engine) 12 pcs (reflector w/optic)

Product	Model	Description
38564	NYXDM4SQ/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38565	NYXDM4SQ/M9CCT5S/DUALDIM/WD/BB	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38566	NYXDM4SQ/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38567	NYXDM4SQ/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38568	NYXDM4SQ/M9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38569	NYXDM4SQ/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38570	NYXDM4SQ/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange
38571	NYXDM4SQ/M9CCT5S/DUALDIM/MD/BB	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38572	NYXDM4SQ/M9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38573	NYXDM4SQ/M9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38574	NYXDM4SQ/M9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 4" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange
38575	NYXDM6SQ/M9CCT5S/DUALDIM/WD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector White Flange
38576	NYXDM6SQ/M9CCT5S/DUALDIM/WD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Clear Reflector Clear Flange (Dead Front)
38577	NYXDM6SQ/M9CCT5S/DUALDIM/WD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Reflector White Flange (Dead Front)
38578	NYXDM6SQ/M9CCT5S/DUALDIM/WD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, White Baffle Reflector White Flange
38579	NYXDM6SQ/M9CCT5S/DUALDIM/WD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Baffle Reflector White Flange
38580	NYXDM6SQ/M9CCT5S/DUALDIM/WD/BB	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wide Beam, Black Reflector Black Flange (Dead Front)
38581	NYXDM6SQ/M9CCT5S/DUALDIM/MD/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector White Flange
38582	NYXDM6SQ/M9CCT5S/DUALDIM/MD/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Clear Reflector Clear Flange (Dead Front)
38583	NYXDM6SQ/M9CCT5S/DUALDIM/MD/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Reflector White Flange (Dead Front)
38584	NYXDM6SQ/M9CCT5S/DUALDIM/MD/WBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, White Baffle Reflector White Flange
38585	NYXDM6SQ/M9CCT5S/DUALDIM/MD/BBW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Baffle Reflector White Flange
38586	NYXDM6SQ/M9CCT5S/DUALDIM/MD/BB	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Medium Beam, Black Reflector Black Flange (Dead Front)
38587	NYXDM6SQ/M9CCT5S/DUALDIM/WWW/CW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, White Flange
38588	NYXDM6SQ/M9CCT5S/DUALDIM/WWW/CC	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash Clear, Clear Flange
38589	NYXDM6SQ/M9CCT5S/DUALDIM/WWW/WWW	NYX Direct Mount 6" Square Downlight Selectable Lumen 4,000, CRI90,Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac,Wall Wash White, White Flange



NYX SERIES















PART ORDERING INFORMATION

Product	Model	Description	Pictures
37414	NYX4/RD/S9CCT5S/DUALDIM	NYX 4" Round Small Light Engine Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37415	NYX4/SQ/S9CCT5S/DUALDIM	NYX 4" Square Small Light Engine Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37416	NYX6/RD/S9CCT5S/DUALDIM	NYX 6" Round Small Light Engine Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37417	NYX6/RD/M9CCT5S/DUALDIM	NYX 6" Round Medium Light Engine Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37418	NYX6/SQ/S9CCT5S/DUALDIM	NYX 6" Square Small Light Engine Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37846	NYX8/RD/S9CCT5S/DUALDIM	NYX 8" Round Small Light Engine Selectable Lumen 2000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37847	NYX8/RD/M9CCT5S/DUALDIM	NYX 8" Round Medium Light Engine Selectable Lumen 4000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dual Dimming 0-10V/ELV&Triac	
37848	NYX8/RD/L9CCT5S/DIM010UNV	NYX 8" Round Large Light Engine Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming 0-10V	
37872	NYX8/RD/L9CCT5S/DIM120V	NYX 8" Round Large Light Engine Selectable Lumen 6000lm, CRI90, Selectable CCT 27/30/35/40/50K, Dimming ELV&Triac	
37419	NYX4/RLFINS/RD/C/WD	NYX 4" Reflector Insert Round Clear (no flange) with Wide Diffuser	
37420	NYX4/RLFINS/RD/C/MD	NYX 4" Reflector Insert Round Clear (no flange) with Medium Optic	
37421	NYX4/RLFINS/RD/WB/WD	NYX 4" Reflector Insert Round White Baffle Style (no flange) with Wide Diffuser	
37422	NYX4/RLFINS/RD/WB/MD	NYX 4" Reflector Insert Round White Baffle Style (no flange) with Medium Optic	
37423	NYX4/RLFINS/RD/BB/WD	NYX 4" Reflector Insert Round Black Baffle Style (no flange) with Wide Diffuser	



NYX SERIES










PART ORDERING INFORMATION

Product	Model	Description	Pictures
37424	NYX4/RLFINS/RD/BB/MD	NYX 4" Reflector Insert Round Black Baffle Style (no flange) with Medium Optic	
37425	NYX4/RLFINSDF/RD/CC/WD	NYX 4" Reflector Insert Dead Front Round Clear and Clear flange with Wide Diffuser	
37426	NYX4/RLFINSDF/RD/CC/MD	NYX 4" Reflector Insert Dead Front Round Clear and Clear flange with Medium Optic	
37427	NYX4/RLFINSDF/RD/WW/WD	NYX 4" Reflector Insert Dead Front Round White and White flange with Wide Diffuser	
37428	NYX4/RLFINSDF/RD/WW/MD	NYX 4" Reflector Insert Dead Front Round White and White flange with Medium Optic	
37429	NYX4/RLFINS/SQ/C/WD	NYX 4" Reflector Insert Square Clear (no flange) with Wide Diffuser	
37430	NYX4/RLFINS/SQ/C/MD	NYX 4" Reflector Insert Square Clear (no flange) with Medium Optic	
37431	NYX4/RLFINS/SQ/WB/WD	NYX 4" Reflector Insert Square White Baffle Style (no flange) with Wide Diffuser	
37432	NYX4/RLFINS/SQ/WB/MD	NYX 4" Reflector Insert Square White Baffle Style (no flange) with Medium Optic	
37433	NYX4/RLFINS/SQ/BB/WD	NYX 4" Reflector Insert Square Black Baffle Style (no flange) with Wide Diffuser	
37434	NYX4/RLFINS/SQ/BB/MD	NYX 4" Reflector Insert Square Black Baffle Style (no flange) with Medium Optic	
37435	NYX4/RLFINSDF/SQ/CC/WD	NYX 4" Reflector Insert Dead Front Square Clear and Clear flange with Wide Diffuser	
37436	NYX4/RLFINSDF/SQ/CC/MD	NYX 4" Reflector Insert Dead Front Square Clear and Clear flange with Medium Optic	
37437	NYX4/RLFINSDF/SQ/WW/WD	NYX 4" Reflector Insert Dead Front Square White and White flange with Wide Diffuser	



NYX SERIES




PART ORDERING INFORMATION

Product	Model	Description	Pictures
37438	NYX4/RLFINSDF/SQ/WW/MD	NYX 4" Reflector Insert Dead Front Square White and White flange with Medium Optic	
37439	NYX6/RLFINS/RD/C/WD	NYX 6" Reflector Insert Round Clear (no flange) with Wide Diffuser	
37440	NYX6/RLFINS/RD/C/MD	NYX 6" Reflector Insert Round Clear (no flange) with Medium Optic	
37441	NYX6/RLFINS/RD/WB/WD	NYX 6" Reflector Insert Round White Baffle Style (no flange) with Wide Diffuser	
37442	NYX6/RLFINS/RD/WB/MD	NYX 6" Reflector Insert Round White Baffle Style (no flange) with Medium Optic	
37443	NYX6/RLFINS/RD/BB/WD	NYX 6" Reflector Insert Round Black Baffle Style (no flange) with Wide Diffuser	
37444	NYX6/RLFINS/RD/BB/MD	NYX 6" Reflector Insert Round Black Baffle Style (no flange) with Medium Optic	
37445	NYX6/RLFINSDF/RD/CC/WD	NYX 6" Reflector Insert Dead Front Round Clear and Clear flange with Wide Diffuser	
37446	NYX6/RLFINSDF/RD/CC/MD	NYX 6" Reflector Insert Dead Front Round Clear and Clear flange with Medium Optic	
37447	NYX6/RLFINSDF/RD/WW/WD	NYX 6" Reflector Insert Dead Front Round White and White flange with Wide Diffuser	
37448	NYX6/RLFINSDF/RD/WW/MD	NYX 6" Reflector Insert Dead Front Round White and White flange with Medium Optic	
37449	NYX6/RLFINS/SQ/C/WD	NYX 6" Reflector Insert Square Clear (no flange) with Wide Diffuser	
37450	NYX6/RLFINS/SQ/C/MD	NYX 6" Reflector Insert Square Clear (no flange) with Medium Optic	
37451	NYX6/RLFINS/SQ/WB/WD	NYX 6" Reflector Insert Square White Baffle Style (no flange) with Wide Diffuser	



NYX SERIES

PART ORDERING INFORMATION

Product	Model	Description	Pictures
37452	NYX6/RLFINS/SQ/WB/MD	NYX 6" Reflector Insert Square White Baffle Style (no flange) with Medium Optic	
37453	NYX6/RLFINS/SQ/BB/WD	NYX 6" Reflector Insert Square Black Baffle Style (no flange) with Wide Diffuser	
37454	NYX6/RLFINS/SQ/BB/MD	NYX 6" Reflector Insert Square Black Baffle Style (no flange) with Medium Optic	
37455	NYX6/RLFINSDF/SQ/CC/WD	NYX 6" Reflector Insert Dead Front Square Clear and Clear flange with Wide Diffuser	
37456	NYX6/RLFINSDF/SQ/CC/MD	NYX 6" Reflector Insert Dead Front Square Clear and Clear flange with Medium Optic	
37457	NYX6/RLFINSDF/SQ/WW/WD	NYX 6" Reflector Insert Dead Front Square White and White flange with Wide Diffuser	
37458	NYX6/RLFINSDF/SQ/WW/MD	NYX 6" Reflector Insert Dead Front Square White and White flange with Medium Optic	
37849	NYX8/RFLINS/RD/C/WD	NYX 8" Reflector Insert Round Clear (no flange) with Wide Diffuser	
37850	NYX8/RFLINS/RD/C/MD	NYX 8" Reflector Insert Round Clear (no flange) with Medium Optic	
37851	NYX8/RFLINS/RD/WB/WD	NYX 8" Reflector Insert Round White Baffle Style (no flange) with Wide Diffuser	
37852	NYX8/RFLINS/RD/WB/MD	NYX 8" Reflector Insert Round White Baffle Style (no flange) with Medium Optic	
37853	NYX8/RFLINS/RD/BB/WD	NYX 8" Reflector Insert Round Black Baffle Style (no flange) with Wide Diffuser	
37854	NYX8/RFLINS/RD/BB/MD	NYX 8" Reflector Insert Round Black Baffle Style (no flange) with Medium Optic	
37855	NYX8/RFLINSDF/RD/CC/WD	NYX 8" Reflector Insert Dead Front Round Clear and Clear flange with Wide Diffuser	



NYX SERIES

PART ORDERING INFORMATION

Product	Model	Description	Pictures
37856	NYX8/RFLINSDF/RD/CC/MD	NYX 8" Reflector Insert Dead Front Round Clear and Clear flange with Medium Optic	
37857	NYX8/RFLINSDF/RD/WW/WD	NYX 8" Reflector Insert Dead Front Round White and White flange with Wide Diffuser	
37858	NYX8/RFLINSDF/RD/WW/MD	NYX 8" Reflector Insert Dead Front Round White and White flange with Medium Optic	
37459	NYX4/WW/RD/C	NYX 4" Round Wall Wash Accessory Clear Finish	
37460	NYX4/WW/RD/W	NYX 4" Round Wall Wash Accessory White Finish	
37461	NYX4/WW/SQ/C	NYX 4" Square Wall Wash Accessory Clear Finish	
37462	NYX4/WW/SQ/W	NYX 4" Square Wall Wash Accessory White Finish	
37463	NYX6/WW/RD/C	NYX 6" Round Wall Wash Accessory Clear Finish	
37464	NYX6/WW/RD/W	NYX 6" Round Wall Wash Accessory White Finish	
37465	NYX6/WW/SQ/C	NYX 6" Square Wall Wash Accessory Clear Finish	
37466	NYX6/WW/SQ/W	NYX 6" Square Wall Wash Accessory White Finish	
37859	NYX8/WW/RD/C	NYX 8" Round Wall Wash Accessory Clear Finish	
37860	NYX8/WW/RD/W	NYX 8" Round Wall Wash Accessory White Finish	
37467	NYX4/OPT/RD/WD	NYX 4" Round Wide Diffuser	



NYX SERIES


PART ORDERING INFORMATION

Product	Model	Description	Pictures
37468	NYX4/OPT/RD/MD	NYX 4" Round Medium Optic	
37469	NYX4/OPT/SQ/WD	NYX 4" Square Wide Diffuser	
37470	NYX4/OPT/SQ/MD	NYX 4" Square Medium Optic	
37471	NYX6/OPT/RD/WD	NYX 6" Round Wide Diffuser	
37472	NYX6/OPT/RD/MD	NYX 6" Round Medium Optic	
37473	NYX6/OPT/SQ/WD	NYX 6" Square Wide Diffuser	
37474	NYX6/OPT/SQ/MD	NYX 6" Square Medium Optic	
37861	NYX8/OPT/RD/WD	NYX 8" Round Wide Diffuser	
37862	NYX8/OPT/RD/MD	NYX 8" Round Medium Optic	
37475	NCF4RDST	4" Round New Construction Frame with Studs	
37476	NCF6RDST	6" Round New Construction Frame with Studs	
37477	NCF4SQST	4" Square New Construction Frame with Studs	
37478	NCF6SQST	6" Square New Construction Frame with Studs	
37863	NCF8RDST	8" Round New Construction Frame with Studs	

NYX SERIES

PHOTOMETRY


NYXNC4RD/S9CCT5S/DUALDIM/MD/CC



Lumens: 2,206 lm
 CBCP: 1,850 cd
 Power: 20 W
 Efficacy: 108 lm/W
 CRI: 92
 Spacing Criteria: 0.91
 Beam Angle: 62°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,718	8	40	10	0-30	1,153	52
20	1,385	10	26	12	0-40	1,632	74
30	966	12	18	14	0-60	2,141	97
40	581	15	11	18	0-90	2,203	100
50	294	20	6	24			
60	112						
70	11						
80	0						
90	0						


NYXNC4RD/S9CCT5S/DUALDIM/WD/CC



Lumens: 2,147 lm
 CBCP: 1,354 cd
 Power: 20 W
 Efficacy: 106 lm/W
 CRI: 92
 Spacing Criteria: 1.08
 Beam Angle: 78°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,311	8	30	13	0-30	970	45
20	1,174	10	19	16	0-40	1,469	68
30	945	12	14	20	0-60	2,073	97
40	650	15	9	24	0-90	2,144	100
50	358	20	5	33			
60	133						
70	15						
80	1						
90	0						

NYXNC4RD/S9CCT5S/DUALDIM/WW/CC

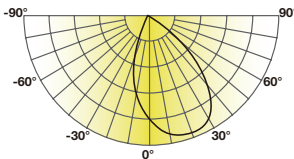


Lumens: 1,361 lm
 CBCP: 785 cd
 Power: 20 W
 Efficacy: 67 lm/W
 CRI: 92
 Spacing Criteria: 1.31
 Beam Angle: 79°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	645	8	15	13	0-30	492	36
20	586	10	10	16	0-40	777	57
30	508	12	7	20	0-60	1,213	89
40	401	15	4	25	0-90	1,359	100
50	269	20	2	33			
60	145						
70	67						
80	15						
90	0						

NYX SERIES

PHOTOMETRY


NYXNC4SQ/S9CCT5S/DUALDIM/MD/CC



Lumens: 2,153 lm
 CBCP: 1,658 cd
 Power: 20 W
 Efficacy: 106 lm/W
 CRI: 92
 Spacing Criteria: 0.98
 Beam Angle: 68°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,567	8	36	11	0-30	1,098	51
20	1,336	9	29	12	0-40	1,588	74
30	980	10	23	13	0-60	2,088	97
40	592	12	16	16	0-90	2,150	100
50	294	15	10	20			
60	109						
70	15						
80	1						
90	0						


NYXNC4SQ/S9CCT5S/DUALDIM/WD/CC



Lumens: 2,108 lm
 CBCP: 1,383 cd
 Power: 20 W
 Efficacy: 104 lm/W
 CRI: 92
 Spacing Criteria: 1.07
 Beam Angle: 76°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,342	8	31	12	0-30	990	47
20	1,203	10	20	16	0-40	1,482	70
30	950	12	14	19	0-60	2,037	97
40	624	15	9	23	0-90	2,105	100
50	327	20	5	31			
60	121						
70	17						
80	2						
90	0						

NYXNC4SQS9CCT5SDUALDIMWWCC

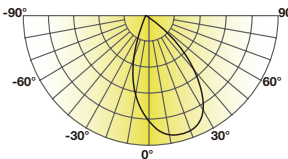

Lumens: 1,265 lm
 CBCP: 904 cd
 Power: 20 W
 Efficacy: 63 lm/W
 CRI: 92
 Spacing Criteria: 1.21
 Beam Angle: 69°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	718	8	17	11	0-30	539	43
20	656	10	11	14	0-40	821	65
30	537	12	7	17	0-60	1,178	93
40	378	15	5	21	0-90	1,264	100
50	222	20	3	28			
60	103						
70	45						
80	9						
90	0						



NYX SERIES

PHOTOMETRY


NYXNC6RD/M9CCT5S/DUALDIM/MD/CC



Lumens: 4,084 lm
CBCP: 3,169 cd
Power: 39 W
Efficacy: 110 lm/W
CRI: 92
Spacing Criteria: 0.89
Beam Angle: 64°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	290	8	7	10	0-30	1,942	48
20	2,264	10	4	12	0-40	2,820	69
30	1,670	12	3	15	0-60	3,896	95
40	1,092	15	2	19	0-90	4,077	100
50	635	20	1	25			
60	258						
70	67						
80	1						
90	0						


NYXNC6RD/M9CCT5S/DUALDIM/WD/CC



Lumens: 3,936 lm
CBCP: 2,175 cd
Power: 39 W
Efficacy: 105 lm/W
CRI: 92
Spacing Criteria: 1.09
Beam Angle: 85°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,089	8	49	15	0-30	1,552	39
20	1,865	10	31	18	0-40	2,411	61
30	1,554	12	22	22	0-60	3,686	94
40	1,188	15	14	27	0-90	3,929	100
50	776	20	8	37			
60	378						
70	81						
80	2						
90	0						

NYXNC6RD/S9CCT5S/DUALDIM/MD/CC



Lumens: 2,329 lm
CBCP: 1,767 cd
Power: 20 W
Efficacy: 114 lm/W
CRI: 92
Spacing Criteria: 0.91
Beam Angle: 65°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,628	8	38	10	0-30	1,091	47
20	1,299	10	24	13	0-40	1,591	68
30	949	12	17	15	0-60	2,217	95
40	626	15	11	19	0-90	2,326	100
50	363	20	6	26			
60	156						
70	38						
80	0						
90	0						



NYX SERIES

PHOTOMETRY


NYXNC6RD/S9CCT5S/DUALDIM/WD/CC



Lumens: 2,356 lm
CBCP: 1,307 cd
Power: 20 W
Efficacy: 115 lm/W
CRI: 92
Spacing Criteria: 1.10
Beam Angle: 85°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,254	8	29	15	0-30	930	40
20	1,119	9	19	18	0-40	1,445	61
30	933	10	13	22	0-60	2,208	94
40	704	12	8	27	0-90	2,353	100
50	458	15	5	37			
60	219						
70	46						
80	1						
90	0						


NYXNC6SQ/S9CCT5S/DUALDIM/MD/CC



Lumens: 2,237 lm
CBCP: 1,531 cd
Power: 20 W
Efficacy: 109 lm/W
CRI: 92
Spacing Criteria: 0.97
Beam Angle: 70°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,444	8	34	11	0-30	1,004	45
20	1,211	10	21	14	0-40	1,480	66
30	906	12	15	17	0-60	2,108	94
40	611	15	10	21	0-90	2,234	100
50	366	20	5	28			
60	178						
70	54						
80	1						
90	0						

NYXNC6SQ/S9CCT5S/DUALDIM/WD/CC



Lumens: 2,269 lm
CBCP: 1,290 cd
Power: 20 W
Efficacy: 111 lm/W
CRI: 92
Spacing Criteria: 1.11
Beam Angle: 83°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,250	8	29	14	0-30	934	41
20	1,128	10	19	18	0-40	1,440	64
30	930	12	13	21	0-60	2,137	94
40	678	15	8	26	0-90	2,265	100
50	416	20	5	35			
60	193						
70	46						
80	1						
90	0						



NYX SERIES

PHOTOMETRY

NYXNC6SQ/S9CCT5S/DUALDIM/WW/CC

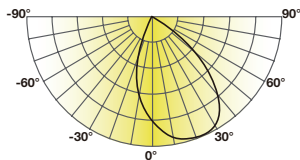


Candlepower Distribution	
Angle (°)	Average (cd)
10	665
20	641
30	532
40	415
50	274
60	138
70	50
80	11
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	15	13
9	10	16
10	7	19
12	4	24
15	2	32

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	505	38
0-40	791	59
0-60	1,220	92
0-90	1,330	100

Lumens: 1,332 lm
 CBCP: 843 cd
 Power: 20 W
 Efficacy: 64 lm/W
 CRI: 92
 Spacing Criteria: 1.31
 Beam Angle: 77°

NYXNC4SQ/M9CCT5S/DUALDIM/WD/CC 3500K Selected)




Candlepower Distribution	
Angle (°)	Average (cd)
10	2,067
20	1,852
30	1,461
40	968
50	509
60	195
70	23
80	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	48	12
10	31	15
12	21	19
15	14	23
20	8	31

Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,526	47
0-40	2,283	70
0-60	3,147	97
0-90	3,253	100

Lumens: 3,259 lm
 CBCP: 2,132 cd
 Power: 35 W
 Efficacy: 97 lm/W
 CRI: 92
 Spacing Criteria: 1.06
 Beam Angle: 76°

NYXNC4SQ/M9CCT5S/DUALDIM/MD/CC (3500K Selected)



Candlepower Distribution	
Angle (°)	Average (cd)
10	2,424
20	2,050
30	1,504
40	915
50	457
60	185
70	21
80	2
90	0

Initial Footcandles		
Height (ft)	Fc	Diameter (ft)
8	56	11
10	36	13
12	25	16
15	16	20
20	9	27


Zonal Lumen Summary		
Zone	Lumens	%Fixt
0-30	1,690	51
0-40	2,442	73
0-60	2,960	89
0-90	3,333	100

Lumens: 3,339 lm
 CBCP: 2,561 cd
 Power: 35 W
 Efficacy: 99 lm/W
 CRI: 92
 Spacing Criteria: 0.96
 Beam Angle: 67°

NYX SERIES

PHOTOMETRY


NYXNC4RD/M9CCT5S/DUALDIM/WD/CC (3500K Selected)



Lumens: 3,655 lm
 CBCP: 1,793cd
 Power: 35 W
 Efficacy: 108 lm/W
 CRI: 92
 Spacing Criteria: 1.18
 Beam Angle: 90°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,752	8	41	16	0-30	1,358	37
20	1,632	10	26	20	0-40	2,143	59
30	1,419	12	18	24	0-60	3,301	90
40	1,080	15	12	30	0-90	3,648	100
50	704	20	7	40			
60	363						
70	135						
80	46						
90	0						


NYXNC4RD/M9CCT5S/DUALDIM/MD/CC (3500K Selected)



Lumens: 3,675 lm
 CBCP: 2,650 cd
 Power: 35 W
 Efficacy: 109 lm/W
 CRI: 92
 Spacing Criteria: 0.92
 Beam Angle: 65°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,478	8	58	10	0-30	1,688	46
20	2,036	9	45	12	0-40	2,440	66
30	1,476	10	37	13	0-60	3,398	92
40	955	12	26	15	0-90	3,669	100
50	573	15	16	19			
60	284						
70	102						
80	34						
90	0						

NYXNC6SQ/M9CCT5S/DUALDIM/WD/CC (3500K Selected)



Lumens: 3,917 lm
 CBCP: 2,196 cd
 Power: 40 W
 Efficacy: 103 lm/W
 CRI: 92
 Spacing Criteria: 1.1
 Beam Angle: 83°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,130	8	49	14	0-30	1,602	41
20	1,933	10	32	18	0-40	2,477	63
30	1,616	12	22	21	0-60	3,685	94
40	1,185	15	14	27	0-90	3,910	100
50	736	20	8	36			
60	343						
70	83						
80	3						
90	0						



NYX SERIES

PHOTOMETRY


NYXNC6SQ/M9CCT5S/DUALDIM/MD/CC (3500K Selected)



Lumens: 3,882 lm
 CBCP: 2,675cd
 Power: 40 W
 Efficacy: 102 lm/W
 CRI: 92
 Spacing Criteria: 0.95
 Beam Angle: 69°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,512	8	58	11	0-30	1,743	45
20	2,100	10	37	14	0-40	2,567	66
30	1,578	12	26	17	0-60	3,656	94
40	1,069	15	17	21	0-90	3,875	100
50	644	20	9	28			
60	311						
70	85						
80	2						
90	0						


NYXNC8RD/S9CCT5S/DUALDIM/MD/CC (3500K Selected)



Lumens: 2,357 lm
 CBCP: 1,808 cd
 Power: 20 W
 Efficacy: 116 lm/W
 CRI: 92
 Spacing Criteria: 0.84
 Beam Angle: 60°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,581	8	37	9	0-30	1,041	44
20	1,236	10	23	11	0-40	1,509	64
30	895	12	16	14	0-60	2,169	92
40	618	15	10	17	0-90	2,354	100
50	395	20	6	23			
60	226						
70	80						
80	2						
90	0						

NYXNC8RD/S9CCT5S/DUALDIM/WD/CC (3500K Selected)




Lumens: 2,457 lm
 CBCP: 1,156 cd
 Power: 20 W
 Efficacy: 121 lm/W
 CRI: 92
 Spacing Criteria: 1.16
 Beam Angle: 94°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	1,120	8	26	17	0-30	857	35
20	1,030	10	17	22	0-40	1,359	55
30	889	12	12	26	0-60	55	90
40	714	15	7	32	0-90	2,453	100
50	517	20	4	43			
60	306						
70	105						
80	4						
90	0						

NYX SERIES

PHOTOMETRY


NYXNC8RD/M9CCT5S/DUALDIM/MD/CC (3500K Selected)



Lumens: 4,296 lm
 CBCP: 3,111cd
 Power: 40 W
 Efficacy: 115 lm/W
 CRI: 92
 Spacing Criteria: 0.87
 Beam Angle: 63°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,825	8	66	10	0-30	1,881	44
20	2,243	10	42	12	0-40	2,741	64
30	1,642	12	29	15	0-60	3,948	92
40	1,125	15	19	18	0-90	4,288	100
50	727	20	10	25			
60	415						
70	145						
80	4						
90	0						


NYXNC8RD/M9CCT5S/DUALDIM/WD/CC (3500K Selected)



Lumens: 4,442 lm
 CBCP: 2,086 cd
 Power: 40 W
 Efficacy: 119 lm/W
 CRI: 92
 Spacing Criteria: 1.15
 Beam Angle: 94°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	2,027	8	47	17	0-30	1,548	35
20	1,859	10	30	21	0-40	2,456	55
30	1,606	12	21	26	0-60	3,980	90
40	1,290	15	13	32	0-90	4,432	100
50	933	20	8	43			
60	556						
70	194						
80	7						
90	0						

NYXNC8RD/L9CCT5S/DIM010UNV/MD/CC (3500K Selected)



Lumens: 6,336 lm
 CBCP: 4,411 cd
 Power: 60 W
 Efficacy: 108 lm/W
 CRI: 92
 Spacing Criteria: 0.88
 Beam Angle: 65°


Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	4,069	8	95	10	0-30	2,718	43
20	3,233	10	60	13	0-40	3,980	63
30	2,403	12	42	15	0-60	5,802	92
40	1,670	15	27	19	0-90	6,323	100
50	1,093	20	15	25			
60	631						
70	224						
80	6						
90	0						



NYX SERIES

PHOTOMETRY

NYXNC8RD/L9CCT5S/DIM010UNV/WD/CC (3500K Selected)



Lumens: 6,593 lm
 CBCP: 3,122cd
 Power: 60 W
 Efficacy: 112 lm/W
 CRI: 92
 Spacing Criteria: 1.15
 Beam Angle: 94°

Candlepower Distribution		Initial Footcandles			Zonal Lumen Summary		
Angle (°)	Average (cd)	Height (ft)	Fc	Diameter (ft)	Zone	Lumens	%Fixt
10	3,018	8	70	17	0-30	2,304	35
20	2,766	10	45	21	0-40	4,927	75
30	2,387	12	31	26	0-60	5,915	90
40	1,057	15	20	32	0-90	6,578	100
50	1,384	20	11	43			
60	825						
70	281						
80	11						
90	0						

CERTIFICATION INFORMATION

Model	ES ID#
NYX****#**/#9CCT5S/DUALDIM/**/****	2740471
NYXICAT6RD/**/#9CCT5S/DUALDIM/**/****	2740470
NYX**8RD/M9CCT5S/DUALDIM/**/****	3473694
NYX**8RD/S9CCT5S/DUALDIM/**/****	3473695
NYX**8RD/L9CCT5S/DIM010UNV/**/****	3463035
NYX**8RD/L9CCT5S/DIM120V/**/****	3473693
NYX****#**/#9CCT5S/DUALDIM/**/****	2740471
NYXICAT6RD/**/#9CCT5S/DUALDIM/**/****	2740470

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.